

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 340 838 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
03.09.2003 Bulletin 2003/36

(51) Int Cl.7: **C23C 16/54, H01L 21/205,
H01L 21/31, H01L 21/302**

(21) Application number: 01996640.7

(86) International application number:
PCT/JP01/09941

(22) Date of filing: 14.11.2001

(87) International publication number:
WO 02/040742 (23.05.2002 Gazette 2002/21)

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

- YUASA, Motokazu, Sekisui Chemical Co., Ltd.
Mishima-gun, Osaka 618-8599 (JP)
- HOMMA, Koji, Chemitronics Co., Ltd.
Tokyo 207-0021 (JP)
- KOZUMA, Makoto, Sekisui Chemical Co., Ltd.
Tokyo 192-0906 (JP)

(30) Priority: 14.11.2000 JP 2000346859
14.11.2000 JP 2000346861

(71) Applicant: SEKISUI CHEMICAL CO., LTD.
Osaka-shi, Osaka 530-8565 (JP)


(74) Representative: Molnas, Michel et al
Cabinet Michel Molnas
13 Chemin du Levant
01210 Ferney-Voltaire (FR)

(72) Inventors:
• YARA, Takuya, Sekisui Chemical Co., Ltd.
Mishima-gun, Osaka 618-8589 (JP)

(54) METHOD AND DEVICE FOR ATMOSPHERIC PLASMA PROCESSING

(57) A method and a device for atmospheric plasma processing: the method capable of processing a processed body, comprising the steps of: under a pressure near the atmospheric pressure, installing a fixed dielectric on the opposed surface of at least one of a pair of electrodes opposed to each other. Loading processing gas between the pair of opposed electrodes, and applying a field between the electrodes to provide plasma, and allowing the plasma to come into contact with the processed body, characterized in that the processed gas is exhausted from near a processed part for allowing the plasma to come into contact with the processed body, and the area near the processed part is held in a specified gas atmosphere by a gas atmosphere conditioning mechanism.

Figure 5

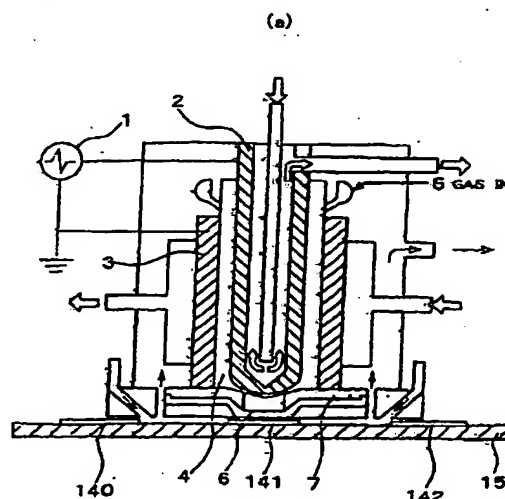

EP 1 340 838 A1

Description

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0001] The present invention relates to a method for plasma treatment under the atmospheric pressure and an equipment therefor having a gas atmosphere control mechanism, whereby an used gas of the treatment is exhausted from the vicinity of treatment section, and the vicinity of treatment section is maintained under a specified gas atmosphere.

DESCRIPTION OF THE PRIOR ART

[0002] Conventionally, such a method has practically been used that a modification of or a thin film formation onto the surface of an article to be treated is performed by generating a glow discharge plasma under a condition of reduced pressure. However, since the treatment under the condition of reduced pressure needs facilities such as a vacuum chamber and a vacuum exhausting equipment, a complicated treatment procedure, as well as an expensive surface treatment equipment, it has scarcely been used when a substrate having a large area is treated. Therefore, a method for generating a discharge plasma under a pressure near the atmospheric pressure has been proposed.

[0003] Conventional methods for the plasma treatment under the atmospheric pressure include a method for treatment under a helium atmosphere as disclosed in JP-A-2-48626 and another method for treatment under an argon and acetone and/or helium atmosphere as disclosed in JP-A-4-74525. In any of the above-described methods, however, plasma is generated under a gas atmosphere containing organic compounds such as acetone or helium, and thus the gas atmosphere is limited. Further, helium is disadvantageous for an industrial use because of an expensive cost thereof. If the gas containing an organic compound is used, the organic compound itself often reacts with the article to be treated and a desired surface treatment cannot necessarily be obtained.

[0004] In addition, in a film formation in producing a semiconductor element or the like, the conventional method for plasma treatment under the atmospheric pressure is disadvantageous for an industrial process because of a slow treatment speed thereof. Further, in treatments such as thin film formation at a high temperature and dry etching, there has been a problem that an oxidation of the article to be treated, a film formed, an etched part or the like may occur depending on the gas atmosphere in the vicinity of treatment section where plasma and the article to be treated are in contact, resulting in impairing to obtain a good quality of semiconductor element. Even if a treatment is conducted in a closed chamber after evacuated to solve these prob-

lems described above, the treatment cannot be applied to a high speed treatment or a treatment for a substrate having a large area as in the treatment under the reduced pressure. This is the present situation.

SUMMARY OF THE INVENTION

[0005] In view of the above-described problems, an object of the present invention is to provide a method for plasma treatment under the atmospheric pressure and an equipment therefor, which can be applied to the high speed treatment or the treatment for a large area.

[0006] The present inventors, after extensively studied to solve the above-described problems, found that a method enabling the high speed treatment and the large area treatment and also suppressing a deterioration of a thin film formed on a substrate or a cut face of substrate due to etching treatment or the like became possible, by combining the method for plasma treatment under the atmospheric pressure which could realize a stable discharge state under the condition of atmospheric pressure before/after the treatment with a gas atmosphere control mechanism, and accomplished the present invention.

[0007] The first aspect of the present invention provides a method for plasma treatment under the atmospheric pressure for treating the article to be treated comprising: providing a solid dielectric on at least one opposing face of a pair of opposing electrodes under a pressure near the atmospheric pressure; introducing a treatment gas between said a pair of opposing electrodes; generating plasma by applying an electric field between said electrodes; and contacting the plasma with the article to be treated, wherein an used gas is exhausted from the vicinity of treatment section where said plasma and the article to be treated are in contact, and said vicinity of treatment section is maintained under a specified gas atmosphere by a gas atmosphere control mechanism.

[0008] The second aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to the first invention, wherein said exhaustion of the used gas from the vicinity of treatment section is performed by a gas passage control mechanism composed of a passage for plasma gas blown out, a passage to an exhaust gas exit and a sealed space substantially preventing a gas flow to the vicinity of treatment section.

[0009] The third aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to the first invention, wherein said exhaustion of the used gas from the vicinity of treatment section is performed by an exhaustion mechanism which exhausts the used gas from the back side of a support for the article to be treated.

[0010] The fourth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to one of the inventions 1 to

3, wherein said gas atmosphere control mechanism is a mechanism whereby the vicinity of treatment section, where plasma and the article to be treated are in contact, is maintained under the specified gas atmosphere by a gas curtain mechanism.

[0011] The fifth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to one of the inventions 1 to 4, wherein the vicinity of treatment section, where plasma and the article to be treated are in contact, is maintained under the specified gas atmosphere by providing an exhaust gas exit in the periphery of the vicinity of treatment section where the plasma and the article to be treated are in contact, and also the gas curtain mechanism in the periphery of the exhaust gas exit.

[0012] The sixth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to the first invention, wherein, in the plasma treatment using a remote source having an extended length of nozzle equipped in crosswise direction of said article to be treated, an exhaust gas exit is provided in crosswise direction of the treatment section where said plasma and said article to be treated are in contact, and a side seal mechanism is provided in the lengthwise direction of said treatment section.

[0013] The seventh aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to the first invention, wherein the vicinity of treatment section, where plasma and the article to be treated are in contact, is maintained under the specified gas atmosphere by conducting the treatment in a vessel through which the specified gas flows.

[0014] The eighth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to the first invention, wherein at least two chambers composed of chamber 1 enclosing the discharge plasma generation section and the article to be treated and chamber 2 enclosing the chamber 1 are provided, and those chambers are designed so that a gas flows out from the chamber 1 and the external air flows into the chamber 2 by making the pressure in said chamber 2 lower than the pressure in the chamber 1, and also lower than the external atmospheric pressure.

[0015] The ninth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to one of the inventions 1 to 8, wherein the specified gas atmosphere comprises at least one kind of gas selected from the group consisting of nitrogen, argon, helium, neon, xenon and dry air.

[0016] The tenth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to one of the inventions 1 to 8, wherein the electric field applied between the electrodes is a pulse-like electric field having a pulse rise time and/or a pulse decay time of not longer than 10 μ s and a field strength of 10 to 1,000 kV/cm.

[0017] The eleventh aspect of the present invention provides an equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes with a solid dielectric being provided on at least one opposing face thereof; a mechanism for introducing a treatment gas between said a pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a mechanism for contacting plasma obtained by said electric field with the article to be treated; a mechanism for exhausting an used gas; and a mechanism for maintaining the vicinity of treatment section, where said plasma and the article to be treated are in contact, under a specified gas atmosphere.

[0018] The twelfth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to the eleventh invention, wherein the mechanism for exhausting the used gas from the vicinity of treatment section is a gas passage control mechanism composed of a passage for plasma gas blown out, a passage to an exhaust gas exit and a sealed space substantially preventing a gas flow to the vicinity of treatment section.

[0019] The thirteenth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to the eleventh invention, wherein the mechanism for maintaining the vicinity of treatment section, where plasma and the article to be treated are in contact, under the specified gas atmosphere is a gas curtain mechanism.

[0020] The fourteenth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to one of the inventions 11 to 13, wherein the vicinity of treatment section, where plasma and the article to be treated are in contact, is maintained under the specified gas atmosphere, by providing the mechanism for exhausting an used gas in the periphery of treatment section, where plasma and the article to be treated are in contact, and the gas curtain mechanism in the periphery of the mechanism for exhausting an used gas.

[0021] The fifteenth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to the eleventh invention, wherein the vicinity of treatment section, where plasma and the article to be treated are in contact, is maintained under the specified gas atmosphere, by conducting the treatment in a vessel through which a specified gas flows.

[0022] The sixteenth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to the eleventh invention, wherein at least two chambers composed of chamber 1 enclosing a discharge plasma generation section and the article to be treated and chamber 2 enclosing the chamber 1 are provided, and those chambers are designed so that a gas flows out from the chamber 1 and the external air flows into the chamber 2 by making

the pressure in said chamber 2 lower than the pressure in the chamber 1, and also lower than the external atmospheric pressure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023]

Figure 1 shows examples of voltage wave forms of pulse electric field used in the present invention.

Figure 2 shows an example of equipment for plasma treatment under the atmospheric pressure.

Figure 3 shows an example of equipment for plasma treatment under the atmospheric pressure.

Figure 4 shows an example of equipment for plasma treatment under the atmospheric pressure.

Figure 5 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 6 shows drawings illustrating principle of the equipment shown in Figure 5.

Figure 7 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 8 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 9 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 10 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 11 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 12 is examples of bottom views of devices for a specified gas shower function used in the present invention.

Figure 13 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 14 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 15 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

Figure 16 shows an example of equipment for plasma treatment under the atmospheric pressure according to the present invention.

NOTATION

[0024]

1: Power source (high voltage pulse power source)

2,3: Electrode
4: Discharge space
5: Treatment gas inlet
6: Gas blow opening
7: Nozzle
8: Solid dielectric
10: Exhaust gas exit
11: Specified gas inlet
12: Exhaust gas exit
14: Article to be treated
15: Support
16: Side seal
17: Robot
20: Chamber
21,31: Pressure gauge
30: Vessel (Chamber)
32: Rectifier plate
35: Opening
111: Pore
121: Pressure control valve
141-142: Micro-article to be treated
161: Baffle
162: Expansion room
311: Carrying in/out room
312: Cassette
313: Shutter

DETAILED DESCRIPTION OF THE INVENTION

[0025] A method for plasma treatment under the atmospheric pressure of the present invention and an equipment therefor are a method and an equipment comprising: providing a solid dielectric on at least one opposing face of a pair of opposing electrodes under a pressure near the atmospheric pressure; introducing a treatment gas between the pair of opposing electrodes; applying an electric field between the electrodes; and contacting a glow discharge plasma of the treatment gas obtained with an article to be treated, wherein the article to be treated or a thin film formed on the article to be treated is protected as well as contamination of the surrounding environment is prevented, by exhausting an used gas from the vicinity of treatment section, where plasma and the article to be treated are in contact, to protect the article to be treated and the treatment section from an oxidizing atmosphere and other contaminating atmosphere, as well as by maintaining the vicinity of treatment section under a specified gas atmosphere to prevent flow-out of the treatment gas to outside and flow-in of external atmosphere into the treatment section. The present invention will be described in detail hereinbelow.

[0026] The above-described "under a pressure near the atmospheric pressure" means under a pressure of from 1.333×10^4 to 10.664×10^4 Pa. Among others, a range from 9.331×10^4 to 10.397×10^4 Pa is preferable due to an easiness in pressure control and simplicity of the equipment.

[0027] According to the method for plasma treatment under the atmospheric pressure and the equipment therefor of the present invention, a treatment in an open system or in such a low level of airtight system as to prevent a free gas leak becomes possible.

[0028] A treatment gas used in the present invention is not specifically limited as long as it can generate plasma by applying an electric field, and various kinds of gas may be used depending on a purpose of treatment.

[0029] As a raw material gas as a raw material of a thin film, for example, a silane containing gas such as SiH_4 , Si_2H_6 , SiCl_4 , SiH_2Cl_2 and $\text{Si}(\text{CH}_3)_4$ is used to form an amorphous silicon film and a polysilicon film, and the above silane containing gas and a nitrogen containing gas such as anhydrous ammonia and nitrogen gas are used to form a SiN film.

[0030] Further, a silane containing gas such as SiH_4 , Si_2H_6 and tetraethoxysilane and an oxygen gas can be used to obtain an oxide film such as SiO_2 .

[0031] Further, a mixed gas of $\text{Al}(\text{CH}_3)_3$, $\text{In}(\text{C}_2\text{H}_5)_3$, MoCl_6 , WF_6 , $\text{Cu}(\text{HFAcAc})_2$ and TiCl_4 or a silane gas such as SiH_4 can be used to form a thin film of metal such as Al, In, Mo, W and Cu and a metal silicide thin film such as TiSi_2 and WSi_2 .

[0032] Further, $\text{In}(\text{O}i\text{-C}_3\text{H}_7)_3$, $\text{Zn}(\text{OC}_2\text{H}_5)_2$, $\text{In}(\text{CH}_3)_3$, $\text{Zn}(\text{C}_2\text{H}_5)_2$ and the like are used to form a transparent conductive film such as $\text{In}_2\text{O}_3 + \text{Sn}$, $\text{SnO}_2 + \text{Sb}$, $\text{ZnO} + \text{Al}$, and the like.

[0033] Further, B_2H_6 or BCl_3 and NH_3 gas and the like are used to form a BN film, a SiF_4 gas and an oxygen gas and the like are used to form a SiOF film, and $\text{HSi}(\text{OR})_3$, $\text{CH}_3\text{Si}(\text{OR})_3$, $(\text{CH}_3)_2\text{Si}(\text{OR})_2$ and the like are used to form a polymer film and the like.

[0034] Further, $\text{Ta}(\text{OC}_2\text{H}_5)_5$, $\text{Y}(\text{O}i\text{C}_3\text{H}_7)_3$, $\text{Y}(\text{C}_2\text{H}_5)_3$, $\text{Hf}(\text{O}i\text{C}_3\text{H}_7)_4$, $\text{Zn}(\text{C}_2\text{H}_5)_2$ and the like are used to form an oxide film such as Ta_2O_5 , Y_2O_3 , HfO_2 , ZnO_2 .

[0035] In addition, a fluorine containing compound gas such as CF_4 , C_2F_6 , CF_3CFCF_2 and C_4F_8 , an oxygen containing compound gas such as O_2 , O_3 , H_2O , CH_3OH and $\text{C}_2\text{H}_5\text{OH}$; a nitrogen containing compound gas such as N_2 and NH_3 ; a sulfur containing compound gas such as SO_2 and SO_3 ; and a polymerizable hydrophilic monomer gas such as acrylic acid, methacrylamide and poly ethylene glycol dimethacrylate ester can be used depending on a purpose of each treatment.

[0036] Further, a halogen containing gas is used to perform an etching treatment or a dicing treatment, an oxygen containing gas is used to perform a resist treatment or a removal of organic contaminants, and also plasma of an inert gas such as argon and nitrogen can be used to perform a surface cleaning or a surface modification.

[0037] In the present invention, the above-described raw material gas may be used as the treatment gas as it is, but the raw material gas may also be diluted with a dilution gas to be used as the treatment gas, in view of economy and safety. The dilution gas used includes a rare gas such as neon, argon and xenon, and nitrogen.

They may be used alone or in combination of at least two kinds thereof. Conventionally, a treatment in the presence of helium had been conducted in a condition under a pressure near the atmospheric pressure. However, by using the method according to the present invention wherein a pulse-like electric field is applied between electrodes, a stable treatment becomes possible in an argon or a nitrogen atmosphere which is cheaper in comparison with helium, as described above.

[0038] The electrode described above includes those made of a simple substance of metal such as copper and aluminum, an alloy such as stainless steel and brass, an intermetallic compound and the like. The above-described opposing electrodes preferably have a structure in which a distance between the opposing electrodes is approximately constant, to avoid generation of an arc discharge due to a concentrated electric field. An electrode structure satisfying this condition includes those of a parallel flat plates type, a cylinder opposing flat plate type, a sphere opposing flat plate type, a hyperboloid opposing flat plate type and a coaxial cylinders type.

[0039] Alternatively, as a structure other than those which distance between electrodes are approximately constant, a cylinder opposing cylinder type with large cylinders having large curvatures may also be used as the opposing electrodes, because the structure has less possibility in occurrence of the electric field concentration causing the arc discharge. A curvature is preferably at least 20 mm in a radius. A curvature not larger than 20 mm in a radius tends to generate the arc discharge by the electric field concentration, although it depends on a dielectric constant of the solid dielectric. The curvatures of the opposing electrodes may be different from each other, as long as each curvature is not less than the value. Since a larger curvature makes the electrode more likely to be an approximately flat plate, providing a more stable discharge, the curvature is more preferably not less than 40 mm in a radius.

[0040] Further, with regard to the electrodes to generate plasma, a solid dielectric may be provided on at least one of a pair of electrodes, and the pair of electrodes may be arranged to be opposing each other or orthogonal with an appropriate distance between them not to make a short circuit.

[0041] The above-described distance between electrodes may suitably be determined considering a thickness of solid dielectric, a voltage to be applied, a purpose to use plasma, and the like, but it is preferably 0.1 to 50 mm. The distance less than 0.1 mm may not be sufficient for placing electrodes with an appropriate distance thereof. The distance over 50 mm makes difficult to generate an uniform discharge plasma.

[0042] The above-described solid dielectric may be provided on either one or both of the opposing faces of electrodes. In this connection, it is preferable that the solid dielectric is in close contact with the electrode on which the solid dielectric is provided and completely

covers an opposing face of the electrode. This is because if there is an area remaining uncovered with the solid dielectric where electrodes themselves are opposing each other directly, the arc discharge tends to be easily generated at the area.

[0043] A shape of the above-described solid dielectric may be sheet-like or film-like, and a thickness thereof is preferably from 0.01 to 4 mm. Too thick solid dielectric may require a high voltage to generate discharge plasma, whereas too thin solid dielectric may lead to a generation of the arc discharge due to dielectric breakdown when voltage is applied. Further, as a shape of the solid dielectric, a vessel type may also be used.

[0044] A material of solid dielectric includes plastics such as poly(tetrafluoroethylene) and poly(ethylene terephthalate); glass; metal oxides such as silicon dioxide, aluminum oxide, zirconium dioxide and titanium dioxide; complex oxide such as barium titanate; multilayered ones thereof; and the like.

[0045] In particular, the solid dielectric preferably has a specific dielectric constant of not less than 2 (at 25 °C atmosphere, hereinafter the same). Specific examples of the solid dielectric with a particular specific dielectric constant of not less than 2 include poly(tetrafluoroethylene), glass, metal oxides and the like. Further, use of the solid dielectric with a specific dielectric constant of not less than 10 is more preferable to stably generate high density discharge plasma. An upper limit of specific dielectric constant is not specifically limited, but practical materials with a value of about 18,500 are known. As the solid dielectric with the specific dielectric constant of not less than 10, a solid body made of, for example, a metal oxide film made by mixing 5 to 50 % by weight of titanium oxide and 50 to 95 % by weight of aluminum oxide or a metal oxide film containing zirconium oxide, which has a thickness of 10 to 1,000 μm , is preferably used.

[0046] An electric field such as high frequency wave, pulse wave and microwave is applied between the above-described electrodes to generate plasma, and preferably a pulse electric field is applied.

[0047] It is known that under a pressure near the atmospheric pressure, a gas other than the specified gas such as helium and ketone cannot maintain a stable plasma discharge state but to instantaneously shift to the arc discharge state. However, it is understood that a cycle of stopping discharge before shifting to the arc discharge and restarting discharge can be stably realized, by applying the pulse-like electric field.

[0048] The pulse-like electric field includes an impulse type of wave forms of (a) and (b), a pulse-type of wave form of (c) and a modulated type of waveform of (d) as shown in Fig. 1. Fig. 1 shows the cases when voltages of plus and minus are applied repeatedly, but a type of pulse electric field in which voltage is applied only in either side of plus or minus pole may be used. Further, the pulse electric field in which a direct current is superposed may be applied. The wave form of pulse

electric field in the present invention is not limited to those described above, but may be further modulated with a pulse with a different wave form, rise time or frequency.

5 [0049] The above-described rise time and/or decay time are preferably not longer than 10 μs . The times over 10 μs tend to cause the discharge state to shift to the arc discharge and become unstable, making it difficult to maintain a high density plasma state by the pulse electric field. In addition, a shorter rise time or decay time provides more efficient gas ionization in plasma generation, but the pulse electric field with the rise time less than 40 ns is difficult to be practically realized. The times are, therefore, more preferably from 50 ns to 5 μs . In this connection, the rise time here means a period during which a voltage (absolute value) increases continuously, and the decay time means a period during which the voltage (absolute value) decreases continuously.

10 [0050] Further, the decay of pulse electric field should also be preferably steep, and the decay time is preferably of not longer than 10 μs in a time scale similar to the rise time. It is preferable that the rise time and the decay time can be set to the same time, although it depends on a technology to generate the pulse electric field.

15 [0051] Field strength of the above-described pulse electric field is preferably set to be 10 to 1000 kV/cm. The field strength lower than 10 kV/cm requires too long treatment time, whereas the strength over 1000 kV/cm tends to generate the arc discharge.

20 [0052] Frequency of the above-described pulse electric field is preferably not less than 0.5 kHz. The frequency less than 0.5 kHz requires too long treatment time due to a low plasma density. An upper limit in the frequency is not specifically limited, but such high frequency bands as 13.56 MHz commonly used and 500 MHz in test use may be used. The frequency not higher than 500 kHz is preferable in consideration of easiness in adjusting with load and handling. A treatment speed is greatly improved by applying the pulse electric field as described above.

25 [0053] Further, duration time for one pulse in the above-described pulse electric field is preferably not longer than 200 μs . The duration time over 200 μs tends to cause a shift to the arc discharge. The more preferable duration time is 3 to 200 μs . In this connection, the duration time for one pulse here means a continuous "ON time" of one pulse in the electric field consisting of repeating "ON" and "OFF", as shown in Fig. 1.

30 [0054] The article to be treated in the present invention includes semiconductor element; metal; plastics such as polyethylene, polypropylene, polystyrene, polycarbonate, poly(ethylene terephthalate), poly(tetrafluoroethylene), polyimide, liquid crystal polymer, epoxy resin and acrylate resin; glass; ceramics; and the like. A shape of the article to be treated includes plate-like and film-like, but not specifically limited to them. According to the present invention, the treatment method

in accordance with, the present invention can easily respond to the article to be treated with various shapes.

[0055] With regard to a means to make plasma in contact with the article to be treated includes: for example, (1) making plasma in contact with the article to be treated 14 by placing the article to be treated 14 in the discharge space of plasma generated between opposing electrodes 2 and 3, as shown in Fig. 2; and (2) making plasma in contact with the article to be treated 14 by introducing the plasma generated between opposing electrodes 2 and 3 toward the article to be treated 14 placed outside of the discharge space, as shown in Fig. 3 (hereinafter, the latter may be referred to a remote method).

[0056] A practical method for the above-described (1) includes: a method for contacting plasma with the article to be treated placed between the parallel flat plate type electrodes coated with the solid dielectric, wherein a treatment is performed by shower-like plasma using an upper electrode having many holes; a method wherein a film-like substrate travels through the discharge space; and a method wherein a vessel-like solid dielectric having a blow nozzle is placed on one electrode and plasma is blown from the nozzle onto the article to be treated placed on another electrode.

[0057] In addition, a practical method for the above-described (2) includes a method wherein the solid dielectric is extended to form a plasma introducing nozzle which blows out plasma toward the article to be treated placed outside of the discharge space, and the like. In this method, a combination of the parallel flat plate type electrodes and the long nozzle or coaxial cylinder type electrodes and a cylinder type nozzle can be used. In this connection, a material of nozzle tip is not necessarily the above-described solid dielectric, and a metal may be used as long as insulation from the above-described electrodes is secured. Further, a direction of plasma to be blown may be any direction other than the direction rectangular to the article to be treated 14, as shown in Fig. 4 (hereinafter, an equipment using the method of (2) may be referred to a remote source).

[0058] The remote method, among others, in which plasma, generated between opposing electrodes, is blown to the article to be treated through the solid dielectric having the gas blow nozzle, is a method with reduced electric and thermal loads to a substrate, because the material being the article to be treated is less directly exposed to high density plasma space and the gas in plasma state can be delivered only to an intended position on the surface of substrate to perform treatment.

[0059] In the treatment method in accordance with the present invention, in order to prevent an exhaust gas from flowing out to the exterior atmosphere after treating the article to be treated by the above-described method, and also preferably a treated organic substance and the like from re-adhering to the article to be treated, it is required to exhaust the used gas from the vicinity of treat-

ment section where plasma and the article to be treated are in contact. Further, in order to positively heat up the article to be treated, prevent the surface of the article to be treated before treatment from oxidation, prevent the article to be treated from temperature rise during treatment, protect the surface of the article to be treated after treatment, prevent the exhaust gas from flowing out to the exterior atmosphere, recover the gas and the like when plasma generated between electrodes is contacted with the article to be treated, it is necessary to maintain the vicinity of treatment section for the article to be treated under the specified gas atmosphere and use a recovery mechanism for the gas.

[0060] Therefore, the equipment in accordance with the present invention needs to have an exhaustion equipment for the used gas and an atmosphere control mechanism to maintain the vicinity of treatment section, where plasma and the article to be treated are in contact, under the specified gas atmosphere using the specified gas and the like, and control flowing out of the used gas as well as flowing in of a gas from the external atmosphere.

[0061] In this connection, the specified gas here includes nitrogen, argon, helium, neon, xenon, and the like. In addition, dry air may be used in such a case as a treatment in which an oxide film is formed where an influence of oxygen is less.

[0062] Hereinbelow, practical examples will be described using drawings on the exhaustion mechanism for the used gas after treatment, the gas curtain mechanism by the specified gas and the mechanism to prevent flowing in and flowing out of gas through the whole equipment.

[0063] Fig. 5 explains an example of the equipment for controlling gas passages composed of a passage for plasma gas blow using the remote source, a passage to the exhaust gas exit and a space for sealing a gas flow to the vicinity of treatment section. Fig. 5(a) is a schematic cross-sectional view of an example of a coaxial quasi-cylindrical type equipment for plasma discharge treatment as a whole, Figs. 5(b) and 5(c) are magnified drawings of a front and a side cross-sectional views, respectively, for the peripheral section of plasma blow opening, and Fig. 5(d) is a bottom view drawing viewed from the lower side of the plasma blow opening. In Fig. 5(a), discharge space 4 is formed between a quasi-cylindrical inner electrode 2 and a quasi-cylindrical outer electrode 3. Plasma blow opening 6 is baffled so as to have a smaller diameter than that of discharge space 4 by a nozzle member 7 made of the solid dielectric and is designed so that plasma blows out to outside of the discharge space. The cylindrical inner electrode 2 and the cylindrical outer electrode 3 have a cooling function and cool the electrodes themselves by introducing and recovering a coolant along a direction shown by the white arrows. The treatment gas is introduced from introduction inlet 5 to discharge space 4, flows through the discharge space 4, plasmatized by the elec-

tric field applied between electrodes by a power source 1, then blown from gas blow opening 6 onto a micro-article to be treated 141 placed on the support for the article to be treated 15 traveling.

[0064] By using the equipment having a structure shown in Fig. 5, the plasma gas is blown out from the blow opening 6 to treat the micro-article to be treated 141, and the used gas flows along a direction of a passage C1 instead of a direction of a passage C2 contacting with adjacent articles to be treated 140 and 142 placed on a support. Thus an exhaustion is performed efficiently without affecting adjacent bodies to be treated 140 and 142. Fundamental principle of the flow is explained in Fig. 6. Fig. 6 (a) is a drawing to explain a relation between flow volume and pressure when the passage has a baffle, then the passage is divided into two passages. Provided that total flow volume is Q (introduced gas volume), flow volumes in branched passages are Q' (flow volume of exhaust gas) and Q'' (leak volume), respectively, pressure in front of the baffle is P1, pressure in the rear side of the baffle is P2, pressure at an exit of each passage is P3 and P4, respectively, then the following relationships hold:

$$Q = Q' + Q''$$

$$Q' = C'(P2 - P3)$$

$$Q'' = C''(P2 - P4)$$

wherein, $P1 > P2$, and C' and C'' are conductance.

[0065] In this connection, to reduce leak volume Q'' , it is effective to reduce $(P2 - P4)$ and further increase $(P2 - P3)$.

[0066] Therefore, in Fig. 6 (b), showing schematically a passage in the periphery of gas blow opening 6 in Fig. 5, if a cross-sectional area of leak gas passage C2 is sufficiently reduced by sufficiently increasing an area of exhaust gas passage C1 and further by sufficiently decreasing a clearance from the article to be treated 141, then a relation of $C' > C''$ can be attained and thus most of the introduced gas volume can be exhausted and an effect of leakage can be reduced. Further, when a clearance from the article to be treated cannot be reduced or a conductance of exhaust gas passage cannot be increased, a relation of $(P2 - P4) \leq 0$ can be attained to make leak flow volume Q'' zero, by providing the baffle at an entrance of exhaust gas passage to reduce P2 and further by compulsively exhausting from the exhaust gas exit as shown in Fig. 6 (c). In addition, a compulsive exhaustion by a vacuum pump and the like enables to realize a relation of $(P2 - P3) > 0$ and also an exhaustion under a relation of $Q' > Q + a$. Here, a corresponds to a back-flow volume of the external air from a clearance between the nozzle and the article to be

treated, and thus a complete sealing can be attained.

[0067] As described above, when a small area is selectively treated, an efficient treatment and exhaustion can be performed by providing the exhaust gas passage as described above in the periphery of the plasma blow nozzle.

[0068] Fig. 7 is a schematic drawing of an example of unit whereby plasma gas is blown to the article to be treated using a solid dielectric nozzle of the coaxial cylinder type electrode and the used gas is exhausted through a doughnut-like gas exhaustion exit provided in the periphery of the gas blow nozzle. The treatment gas is introduced from treatment gas inlet 5 to the cylindrical solid dielectric vessel along a direction shown by the arrows, plasmatized by applying the electric field between electrode 3 provided outside of the cylindrical solid dielectric vessel and an inner electrode 2 provided inside of the cylindrical solid dielectric vessel from power source 1, and blown out from gas blow opening 6 to treat the article to be treated 14 placed on support 15 which also acts as a conveyor belt and the like. By using such a structure in an etching treatment and the like, an organic substance after etching is removed from exhaust gas cylinder 10 together with the used gas after etching treatment without any contamination by re-adhesion thereof onto the article to be treated 14. Further, leak of the treatment gas to outside can be prevented by enclosing the whole remote source having gas blow opening 6 in a simple vessel, which is filled with the specified gas such as an inert gas. An extent of treatment can be varied by using the conveyor belt which can be freely adjusted in a traveling speed thereof, and further a cooling or a heating mechanism may also be added thereto. A nozzle body made of the cylindrical solid dielectric may also be equipped with a nozzle waiting mechanism, if necessary, which allows the nozzle to wait outside of the article to be treated until plasma is stabilized while a preliminary discharge is conducted after a voltage is applied between electrodes, or equipped with a X-Y-Z shifting mechanism to sweep on the article to be treated.

[0069] Fig. 8 is a schematic drawing of a suction unit to suck the exhaust gas after blown onto the article to be treated from the remote source, from the backside of the support having a number of holes, downward in an alignment of Fig. 8. The treatment gas is introduced from treatment gas inlet 5 to a discharge space 4 formed by electrodes 2 and 3 along a direction shown by the arrows, and plasmatized by applying the electric field from the power source 1, and blown out from the gas blow opening 6 to treat the article to be treated 14 placed on the support 15. Since the support 15 has a number of open holes, the article to be treated can be fixed onto the support by being sucked from the backside thereof as well as the used gas and an excess treatment gas can be removed downward. Therefore, a stationary downward gas flow can be made compulsively to improve treatment accuracy. Further, since a flow of gas flowing in from the periphery of the remote source is

formed and the used gas is confined therein, there is an advantage that the gas from the remote source does not leak to outside. Fig. 8 (b) is an equipment of a combined type of the used gas suction unit (exhaustion member 10) provided in the periphery of gas blow opening 6 shown in Fig. 7 and a downward suction unit provided on the support 15 to perform treatment and recovery efficiently.

[0070] Fig. 9 is a drawing to explain a side seal to prevent a gas flowing out to outside and a gas flowing in from outside through both sides of the plasma treatment section orthogonally to a traveling direction of said article to be treated, in the exhaustion unit for the used gas after blown onto the article to be treated from the remote source having an extended length of nozzle equipped orthogonally to the traveling direction (the vertical direction against this paper plane). Fig. 9 (a) is an example of equipment whereby the plasma obtained by introducing the treatment gas into the discharge space 4 between the parallel flat plate type electrodes 2 and 3 is blown from the long nozzle type of gas blow opening 6 onto the article to be treated 14 on the conveyor support 15 to perform the treatment, and the used gas is exhausted from the exhaust gas exit 10. This equipment corresponds to the coaxial cylinder type electrodes shown in Fig. 7, and in the equipment having the long nozzle, a turbulent gas flow in a flowing direction often causes an uneven thickness of a thin film formed on the surface of the article to be treated. In particular, the unevenness tends to appear remarkably, if the gas blown out from gas blow opening 6 does not flow evenly toward exhaust gas exit 10 but there is a gas flow toward side clearances (both sides of the plasma treatment section orthogonally to a traveling direction of said article to be treated), therefore it is preferable to provide a side seal mechanism. Fig. 9 (b) is a bottom view of Fig. 9 (a) viewed from a side of plasma flowing out opening. A gas blown out from gas blow opening 6, after treating the article to be treated, forms an uniform flow toward exhaust gas exit 10, without generating a gas flow leaking toward sides due to presence of the side seal mechanism 16, and thus forms an uniform thin film and the like on the surface of the article to be treated. Fig. 9 (c) is an example of labyrinth seal, a type of the side seal mechanism. The labyrinth seal is a seal mechanism to prevent a leak of fluid by providing a means such as fitting a baffle in a clearance passage between a movable part and a fixed part. That is, in this equipment, the seal mechanism is used to prevent a leak of plasma gas in a clearance between the movable support to convey the article to be treated and the fixed remote source, and can suppress flowing out of plasma gas to outside while conveying the support without friction, by providing baffles 161 and expansion rooms 162 along the traveling direction of the conveyor at the fixed remote source side and the movable support side alternatively so as to be engaged each other. In this connection, a shape of this labyrinth may be determined depending on plasma gas

flow volume as well as size and shape of the remote source.

[0071] Fig. 10 is a schematic drawing of an example of equipment to maintain the vicinity of treatment section, where plasma and the article to be treated are in contact, under the specified gas atmosphere by possessing the gas exhaustion mechanism in the periphery of the vicinity of treatment section, where plasma and the article to be treated are in contact, and the gas curtain mechanism added with the gas shower function by the specified gas such as an inert gas in the periphery of the gas exhaustion mechanism. The treatment gas is introduced from treatment gas inlet 5 into the cylindrical solid dielectric vessel of the coaxial cylinder type electrodes along a direction shown by the arrows, plasma-
 5
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55
 60
 65
 70
 75
 80
 85
 90
 95
 100
 105
 110
 115
 120
 125
 130
 135
 140
 145
 150
 155
 160
 165
 170
 175
 180
 185
 190
 195
 200
 205
 210
 215
 220
 225
 230
 235
 240
 245
 250
 255
 260
 265
 270
 275
 280
 285
 290
 295
 300
 305
 310
 315
 320
 325
 330
 335
 340
 345
 350
 355
 360
 365
 370
 375
 380
 385
 390
 395
 400
 405
 410
 415
 420
 425
 430
 435
 440
 445
 450
 455
 460
 465
 470
 475
 480
 485
 490
 495
 500
 505
 510
 515
 520
 525
 530
 535
 540
 545
 550
 555
 560
 565
 570
 575
 580
 585
 590
 595
 600
 605
 610
 615
 620
 625
 630
 635
 640
 645
 650
 655
 660
 665
 670
 675
 680
 685
 690
 695
 700
 705
 710
 715
 720
 725
 730
 735
 740
 745
 750
 755
 760
 765
 770
 775
 780
 785
 790
 795
 800
 805
 810
 815
 820
 825
 830
 835
 840
 845
 850
 855
 860
 865
 870
 875
 880
 885
 890
 895
 900
 905
 910
 915
 920
 925
 930
 935
 940
 945
 950
 955
 960
 965
 970
 975
 980
 985
 990
 995
 1000
 1005
 1010
 1015
 1020
 1025
 1030
 1035
 1040
 1045
 1050
 1055
 1060
 1065
 1070
 1075
 1080
 1085
 1090
 1095
 1100
 1105
 1110
 1115
 1120
 1125
 1130
 1135
 1140
 1145
 1150
 1155
 1160
 1165
 1170
 1175
 1180
 1185
 1190
 1195
 1200
 1205
 1210
 1215
 1220
 1225
 1230
 1235
 1240
 1245
 1250
 1255
 1260
 1265
 1270
 1275
 1280
 1285
 1290
 1295
 1300
 1305
 1310
 1315
 1320
 1325
 1330
 1335
 1340
 1345
 1350
 1355
 1360
 1365
 1370
 1375
 1380
 1385
 1390
 1395
 1400
 1405
 1410
 1415
 1420
 1425
 1430
 1435
 1440
 1445
 1450
 1455
 1460
 1465
 1470
 1475
 1480
 1485
 1490
 1495
 1500
 1505
 1510
 1515
 1520
 1525
 1530
 1535
 1540
 1545
 1550
 1555
 1560
 1565
 1570
 1575
 1580
 1585
 1590
 1595
 1600
 1605
 1610
 1615
 1620
 1625
 1630
 1635
 1640
 1645
 1650
 1655
 1660
 1665
 1670
 1675
 1680
 1685
 1690
 1695
 1700
 1705
 1710
 1715
 1720
 1725
 1730
 1735
 1740
 1745
 1750
 1755
 1760
 1765
 1770
 1775
 1780
 1785
 1790
 1795
 1800
 1805
 1810
 1815
 1820
 1825
 1830
 1835
 1840
 1845
 1850
 1855
 1860
 1865
 1870
 1875
 1880
 1885
 1890
 1895
 1900
 1905
 1910
 1915
 1920
 1925
 1930
 1935
 1940
 1945
 1950
 1955
 1960
 1965
 1970
 1975
 1980
 1985
 1990
 1995
 2000
 2005
 2010
 2015
 2020
 2025
 2030
 2035
 2040
 2045
 2050
 2055
 2060
 2065
 2070
 2075
 2080
 2085
 2090
 2095
 2100
 2105
 2110
 2115
 2120
 2125
 2130
 2135
 2140
 2145
 2150
 2155
 2160
 2165
 2170
 2175
 2180
 2185
 2190
 2195
 2200
 2205
 2210
 2215
 2220
 2225
 2230
 2235
 2240
 2245
 2250
 2255
 2260
 2265
 2270
 2275
 2280
 2285
 2290
 2295
 2300
 2305
 2310
 2315
 2320
 2325
 2330
 2335
 2340
 2345
 2350
 2355
 2360
 2365
 2370
 2375
 2380
 2385
 2390
 2395
 2400
 2405
 2410
 2415
 2420
 2425
 2430
 2435
 2440
 2445
 2450
 2455
 2460
 2465
 2470
 2475
 2480
 2485
 2490
 2495
 2500
 2505
 2510
 2515
 2520
 2525
 2530
 2535
 2540
 2545
 2550
 2555
 2560
 2565
 2570
 2575
 2580
 2585
 2590
 2595
 2600
 2605
 2610
 2615
 2620
 2625
 2630
 2635
 2640
 2645
 2650
 2655
 2660
 2665
 2670
 2675
 2680
 2685
 2690
 2695
 2700
 2705
 2710
 2715
 2720
 2725
 2730
 2735
 2740
 2745
 2750
 2755
 2760
 2765
 2770
 2775
 2780
 2785
 2790
 2795
 2800
 2805
 2810
 2815
 2820
 2825
 2830
 2835
 2840
 2845
 2850
 2855
 2860
 2865
 2870
 2875
 2880
 2885
 2890
 2895
 2900
 2905
 2910
 2915
 2920
 2925
 2930
 2935
 2940
 2945
 2950
 2955
 2960
 2965
 2970
 2975
 2980
 2985
 2990
 2995
 3000
 3005
 3010
 3015
 3020
 3025
 3030
 3035
 3040
 3045
 3050
 3055
 3060
 3065
 3070
 3075
 3080
 3085
 3090
 3095
 3100
 3105
 3110
 3115
 3120
 3125
 3130
 3135
 3140
 3145
 3150
 3155
 3160
 3165
 3170
 3175
 3180
 3185
 3190
 3195
 3200
 3205
 3210
 3215
 3220
 3225
 3230
 3235
 3240
 3245
 3250
 3255
 3260
 3265
 3270
 3275
 3280
 3285
 3290
 3295
 3300
 3305
 3310
 3315
 3320
 3325
 3330
 3335
 3340
 3345
 3350
 3355
 3360
 3365
 3370
 3375
 3380
 3385
 3390
 3395
 3400
 3405
 3410
 3415
 3420
 3425
 3430
 3435
 3440
 3445
 3450
 3455
 3460
 3465
 3470
 3475
 3480
 3485
 3490
 3495
 3500
 3505
 3510
 3515
 3520
 3525
 3530
 3535
 3540
 3545
 3550
 3555
 3560
 3565
 3570
 3575
 3580
 3585
 3590
 3595
 3600
 3605
 3610
 3615
 3620
 3625
 3630
 3635
 3640
 3645
 3650
 3655
 3660
 3665
 3670
 3675
 3680
 3685
 3690
 3695
 3700
 3705
 3710
 3715
 3720
 3725
 3730
 3735
 3740
 3745
 3750
 3755
 3760
 3765
 3770
 3775
 3780
 3785
 3790
 3795
 3800
 3805
 3810
 3815
 3820
 3825
 3830
 3835
 3840
 3845
 3850
 3855
 3860
 3865
 3870
 3875
 3880
 3885
 3890
 3895
 3900
 3905
 3910
 3915
 3920
 3925
 3930
 3935
 3940
 3945
 3950
 3955
 3960
 3965
 3970
 3975
 3980
 3985
 3990
 3995
 4000
 4005
 4010
 4015
 4020
 4025
 4030
 4035
 4040
 4045
 4050
 4055
 4060
 4065
 4070
 4075
 4080
 4085
 4090
 4095
 4100
 4105
 4110
 4115
 4120
 4125
 4130
 4135
 4140
 4145
 4150
 4155
 4160
 4165
 4170
 4175
 4180
 4185
 4190
 4195
 4200
 4205
 4210
 4215
 4220
 4225
 4230
 4235
 4240
 4245
 4250
 4255
 4260
 4265
 4270
 4275
 4280
 4285
 4290
 4295
 4300
 4305
 4310
 4315
 4320
 4325
 4330
 4335
 4340
 4345
 4350
 4355
 4360
 4365
 4370
 4375
 4380
 4385
 4390
 4395
 4400
 4405
 4410
 4415
 4420
 4425
 4430
 4435
 4440
 4445
 4450
 4455
 4460
 4465
 4470
 4475
 4480
 4485
 4490
 4495
 4500
 4505
 4510
 4515
 4520
 4525
 4530
 4535
 4540
 4545
 4550
 4555
 4560
 4565
 4570
 4575
 4580
 4585
 4590
 4595
 4600
 4605
 4610
 4615
 4620
 4625
 4630
 4635
 4640
 4645
 4650
 4655
 4660
 4665
 4670
 4675
 4680
 4685
 4690
 4695
 4700
 4705
 4710
 4715
 4720
 4725
 4730
 4735
 4740
 4745
 4750
 4755
 4760
 4765
 4770
 4775
 4780
 4785
 4790
 4795
 4800
 4805
 4810
 4815
 4820
 4825
 4830
 4835
 4840
 4845
 4850
 4855
 4860
 4865
 4870
 4875
 4880
 4885
 4890
 4895
 4900
 4905
 4910
 4915
 4920
 4925
 4930
 4935
 4940
 4945
 4950
 4955
 4960
 4965
 4970
 4975
 4980
 4985
 4990
 4995
 5000
 5005
 5010
 5015
 5020
 5025
 5030
 5035
 5040
 5045
 5050
 5055
 5060
 5065
 5070
 5075
 5080
 5085
 5090
 5095
 5100
 5105
 5110
 5115
 5120
 5125
 5130
 5135
 5140
 5145
 5150
 5155
 5160
 5165
 5170
 5175
 5180
 5185
 5190
 5195
 5200
 5205
 5210
 5215
 5220
 5225
 5230
 5235
 5240
 5245
 5250
 5255
 5260
 5265
 5270
 5275
 5280
 5285
 5290
 5295
 5300
 5305
 5310
 5315
 5320
 5325
 5330
 5335
 5340
 5345
 5350
 5355
 5360
 5365
 5370
 5375
 5380
 5385
 5390
 5395
 5400
 5405
 5410
 5415
 5420
 5425
 5430
 5435
 5440
 5445
 5450
 5455
 5460
 5465
 5470
 5475
 5480
 5485
 5490
 5495
 5500
 5505
 5510
 5515
 5520
 5525
 5530
 5535
 5540
 5545
 5550
 5555
 5560
 5565
 5570
 5575
 5580
 5585
 5590
 5595
 5600
 5605
 5610
 5615
 5620
 5625
 5630
 5635
 5640
 5645
 5650
 5655
 5660
 5665
 5670
 5675
 5680
 5685
 5690
 5695
 5700
 5705
 5710
 5715
 5720
 5725
 5730
 5735
 5740
 5745
 5750
 5755
 5760
 5765
 5770
 5775
 5780
 5785
 5790
 5795
 5800
 5805
 5810
 5815
 5820
 5825
 5830
 5835
 5840
 5845
 5850
 5855
 5860
 5865
 5870
 5875
 5880
 5885
 5890
 5895
 5900
 5905
 5910
 5915
 5920
 5925
 5930
 5935
 5940
 5945
 5950
 5955
 5960
 5965
 5970
 5975
 5980
 5985
 5990
 5995
 6000
 6005
 6010
 6015
 6020
 6025
 6030
 6035
 6040
 6045
 6050
 6055
 6060
 6065
 6070
 6075
 6080
 6085
 6090
 6095
 6100
 6105
 6110
 6115
 6120
 6125
 6130
 6135
 6140
 6145
 6150
 6155
 6160
 6165
 6170
 6175
 6180
 6185
 6190
 6195
 6200
 6205
 6210
 6215
 6220
 6225
 6230
 6235
 6240
 6245
 6250
 6255
 6260
 6265
 6270
 6275
 6280
 6285
 6290
 6295
 6300
 6305
 6310
 6315
 6320
 6325
 6330
 6335
 6340
 6345
 6350
 6355
 6360
 6365
 6370
 6375
 6380
 6385
 6390
 6395
 6400

water intrusion into the treatment section by selecting a gas such as an inert gas. In this connection, the above gas exhaustion mechanism may be used not only in the periphery of nozzle but also in other places for local exhaustion.

[0073] In this connection, the equipment to provide the specified gas shower function in Fig. 11 preferably has a bottom face like those shown in Fig. 12 (a) and Fig. 12(b). Fig. 12 (a) is the specified gas shower equipment for the case using a coaxial cylinder type nozzle and corresponds to a bottom face of the nozzle part in Fig. 10 or 11. The plasma gas is blown out from gas blow opening 6 to treat the article to be treated, then exhausted from the inner circumferential exhaust gas cylinder 10. In addition, the specified gas is blown out from specified gas blow pores 111 locating in the specified gas shower region, and exhausted from exhaust gas exit 12 provided in the whole outer circumference. Fig. 12 (b) is the specified gas shower equipment for the case using a vertical flat plane type long nozzle. Plasma gas is blown out from gas blow opening 6 to treat the article to be treated, then exhausted from the inner circumferential exhaust gas cylinder 10. In addition, the specified gas is blown out from specified gas blow pores 111 locating in the specified gas shower region, and exhausted from exhaust gas exit 12 provided in the whole outer circumference.

[0074] In Figs. 10 and 11, the article to be treated 14 is conveyed on the support which also acts as a conveyor belt, and an extent of treatment on the article to be treated can be controlled by using the conveyor belt having freely adjustable feeding speed. Further, the conveyor belt with a heating function may also be used, if necessary. In addition, the conveyor belt may have a mechanism to shift the nozzle, which is integrated with the exhaustion mechanism and the specified gas shower mechanism, in a traveling direction of the support, a horizontally orthogonal direction thereto and a vertically orthogonal direction thereto, and the integrated nozzle structure may also be scanned.

[0075] Fig. 13 is a schematic drawing of an example of equipment to explain a method for conducting the treatment using the remote source in a vessel filled with the specified gas. In the equipment of Fig. 13, the vessel 30 for the specified gas has a carrying in/out room 311 to use a carrier robot 17 for the article to be treated 14 and a shutter 312 therefor, and is required only to always feed and exhaust the specified gas and air tightness is not necessary. In addition, a vacuum pump is not required but a simple blower type exhauster is enough. Further, the vessel 30 for the specified gas is not required to be pressure proof but a simple chamber is enough. In the treatment equipment enclosed in the vessel 30 for the specified gas, the treatment gas is introduced to the remote source 7 equipped with a X-Y-Z shifting mechanism, and blown onto the article to be treated 14 to perform treatment. The used gas is exhausted from the exhaust gas cylinder 10. Further, the

article to be treated 14 is carried in/out from a cassette 312 in the carry in/out room 311 by the carrier robot 17. In addition, a treated product is carried in/out through the shutter 313.

5 [0076] The method for treatment in the vessel filled with the specified gas has, in particular, such advantages as: the article to be treated can be conveyed without using a preparatory room and the like; treatments such as a continuous treatment and a treatment for a sheet-like product can be easily responded; and the treatment gas can be stably introduced separately.

10 [0077] Fig. 14 is a schematic drawing of an example of equipment to explain the method for treatment by placing articles to be treated as one unit between electrodes in the vessel filled with the specified gas. Since the vessel 30 has the same function as in Fig. 13 and is for an equipment for treating a continuous body such as film and sheet, the whole conveying system composed of a delivery roll and a take-up roll is enclosed in the vessel 30, and the treatment gas is introduced from treatment gas inlet 5 into the discharge space between electrodes 2 and 3 to perform a treatment of the article to be treated 14 simultaneously. This equipment can perform a superior quality of treatment under the specified gas atmosphere, however, the equipment itself may sometimes become too big.

20 [0078] Fig. 15 is a schematic drawing to explain the equipment for plasma treatment by placing the article to be treated between opposing electrodes in the vessel filled with the specified gas. The treatment gas is introduced from treatment gas inlet 5 into the discharge space between electrodes 2 and 3, plasmatized to treat the article to be treated 14 conveyed in continuously, and then recovered from exhaust gas exit 10. The vessel 30 enclosing the whole plasma treatment section is filled with the specified gas, and designed so that a part of the gas can flow through. Although the vessel is always sealed from the exterior atmosphere, in order to completely seal the exterior atmosphere accompanied to the article to be treated 14 conveyed in, it is equipped with the gas curtain mechanism shown in Fig. 11 against both sides of top and bottom of the article to be treated 14 at the carrying in/out opening for the article to be treated 14.

30 [0079] Fig. 16 is a schematic drawing to explain an example of equipment for treating the article to be treated conveyed continuously using the remote source. In Fig. 16, chamber 20 is the plasma treatment section for treating the article to be treated 14 with plasma, and chamber 30 is the vessel to enclose the chamber 20, and each of chambers 20 and 30 is equipped with pressure gauges 21 and 31, respectively, to control pressures thereof. This equipment can prevent a diffusion of treatment gas to the periphery as well as contamination of the exterior air by controlling the pressure of each chamber. Therefore, each room of chambers 20 and 30 is not required to be a strictly airtight vessel such as, in particular, a vacuum container. Further, since the vessel

has an opening to carry in the article to be treated and carry out the treated article, the vessel simply manufactured using a material such as synthetic resins may be used.

[0080] In addition, chamber 20 may optionally have a structure integrated with electrodes and the like.

[0081] Practically, in chamber 20, the treatment gas is introduced via the treatment gas introduction line 5 into the discharge space between electrodes 2 and 3 in the chamber 20, plasmatized by applying the electric field between electrodes from power source 1, and treats the article to be treated 14 placed on the support 15 which acts as the conveyor belt and carried in. Most of the used gas after plasma treatment is recovered by exhaust gas recovery line 10. Chamber 20 is maintained under an atmosphere of a gas which does not affect the treatment gas such as clean dry air and specified gas, and kept at a higher pressure than a pressure in chamber 30. The environmental gas (specified gas and the like) is introduced via the environmental gas introduction line 11 to the upper part of chamber 20, flows through inside of chamber 20, then flows out into chamber 30 together with a part of the exhaust gas after treatment. Since the pressure in chamber 30 is lower than the exterior atmospheric pressure by a predetermined pressure value in order to prevent leak of the gas from chamber 20 to outside, a fixed volume of the exterior air flows in to chamber 30 from openings 35 at both sides and via a rectifier plate 32 provided in an upper part. The exterior air flowed in is recovered via whole exhaust gas line 12 together with flowed-out gas from chamber 20 and the like. The pressure in chamber 30 is controlled by a pressure control valve 121. In this connection, it is required to hold the following relationship among pressures in chambers 20 and 30 and the external air pressure: pressure in chamber 20 > pressure in chamber 30; and pressure in chamber 30 < external air pressure. Values of pressure differences among those of chambers 20, 30 and the external air are not specifically limited, however, a small pressure difference of the level of around several mm H₂O is sufficient, which is not difficult to be adjusted. As the external air, clean air is preferable in the view point of treatment accuracy. In addition, in a treatment which requires strict avoidance of an effect of the external air, such as plasma CVD treatment, an unit composed of not only chambers 20 and 30 but also an intermediate chamber further added may be employed.

[0082] The pressure in each chamber and pressure differences among those chambers and the external air can be adjusted not only by feeding an environmental gas but also by controlling a feed rate of the treatment gas and an exhaustion rate of the used gas. Thus, by controlling pressures in chambers, diffusion of the treatment gas to outside of the equipment can completely be prevented as well as a contamination of the exterior air into the treatment section can be prevented.

[0083] In this connection, for example, if a pressure in the production room as a whole, where the treatment

equipment is installed, is designed to be higher than the atmospheric pressure and the pressure in chamber 30 is designed to be the same to the atmospheric pressure, the exhaust pump from chamber 30 can be omitted by providing a direct exhaustion route from the treatment equipment to outside of the production room.

[0084] The discharge under the atmospheric pressure using the electric field, in particular, the pulse electric field of the present invention, can generate the discharge directly between electrodes under the atmospheric pressure, completely independently from a type of gas, and thus enables to realize the equipment and the treatment procedure for plasma treatment under the atmospheric pressure using more simplified electrode structure and discharge procedure, as well as a high speed treatment. Further, parameters relating to a treatment for the article to be treated can also be adjusted by parameters such as pulse frequency, voltage and the distance between electrodes.

EXAMPLES

[0085] The present invention will be explained in detail hereinbelow using Examples, but the present invention should not be limited to these Examples only.

Example 1

[0086] Using the equipment shown in Fig. 11 and a nitrogen gas as the specified gas, plasma was generated under the following conditions while the exhaust gas was exhausted, to carry out a dry etching of 2 inch (100) of silicon wafer. The solid dielectric used was Al₂O₃, diameter of plasma blow pore was 1 mm and distance from plasma blow opening to substrate was 2 mm.

Plasma treatment conditions:

[0087] Treatment gas: Mixed gas of oxygen 0.1 SLM + CF₄ 0.4 SLM + argon 9.5 SLM.

[0088] Discharge conditions: Wave form (a), rise time / decay time 5 μs; power output 200 W, frequency 10KHz, treatment time 20 sec, and the plasma generated was an uniform discharge without an arc pillar,

[0089] Etched depth was found to be 0.2 μm from cross-sectional observation of the surface of thus obtained silicon wafer using a scanning electron microscope.

Comparative Example 1

[0090] After evacuation of a vacuum chamber, 100 sccm of a mixed gas composed of 5 % of oxygen and 95 % of CF₄ as a treatment gas was introduced to adjust the pressure therein to be 27 Pa, then a voltage having a sin wave form and frequency of 12.2 KHz instead of a pulse electric field was applied to carry out a surface treatment of silicon wafer for 5 min. Etched depth was

found to be 0.1 μm from cross-sectional observation of the surface of thus obtained silicon wafer using a scanning electron microscope.

Comparative Example 2

[0091] Surface treatment of a silicon wafer was carried out in the same manner as in Comparative Example 1 except for setting the treatment time at 20 sec. Etched depth could not be measured by cross-sectional observation of the surface of thus obtained silicon wafer using the scanning electron microscope.

Example 2

[0092] A formation of silicon nitride film was carried out on a substrate using the equipment shown in Fig. 14, which employed a method for contacting plasma with the article to be treated in the vessel filled with the specified gas. In the equipment shown in Fig. 14, parallel flat plate type electrodes made of SUS304 stainless steel with a size of 300 mm width x 100 mm length x 20 mm thickness as an upper electrode 2 and a lower electrode 3, and a thermal-sprayed alumina with a thickness of 1 mm as the solid dielectric 4 were used. Polyimide film 14 (size of 100 x 100 mm, thickness of 50 μm) as a substrate, on which the film was formed, was arranged to travel through a space between the electrodes with a distance of 2 mm, using a delivery roll and a take-up roll.

[0093] As the treatment gas, a mixed gas composed of 0.16 % of tetramethyl silane and 16 % of ammonia was used after diluted with an argon gas. Formation of the silicon nitride film on the polyimide film was carried out by feeding the treatment gas along the direction shown by the white arrows, and applying a pulse electric field having the wave form shown in Fig. 1 (a), a rise time of 5 μs , a voltage of 10 kV between the upper electrode 2 and the lower electrode 3 under a pressure of 95 kPa (under the atmospheric pressure). Further, nitrogen gas, as the specified gas, was fed along the direction shown by the arrows into the vessel 30 to maintain the inside thereof under an inert gas atmosphere. Formation of the silicon nitride film on the treated film was confirmed. Film formation speed in this experiment was 0.42 $\mu\text{m}/\text{sec}$.

Comparative Example 3

[0094] Formation of silicon nitride film was carried out on a substrate in the same manner as in Example 2 except for not adopting the gas atmosphere control mechanism by using the vessel 30. Formation of the silicon nitride film on the film was confirmed, but oxidation of the film surface was observed by the XPS evaluation.

[0095] A method for plasma treatment under the atmospheric pressure near the atmospheric pressure in accordance with the present invention can make a treatment process a more highly accurate system, and con-

tribute to an improvement of treatment yield, because an used gas can be exhausted from the vicinity of treatment section where plasma of treatment gas and the article to be treated are in-contact, and maintain the vicinity of contact treatment section under a specified gas atmosphere. Further, by using the method in accordance with the present invention, speeding up of the whole treatment process can be realized, because the method in accordance with the present invention can be performed under the atmospheric pressure and hence easily accept an in-line operation thereof.

Claims

1. A method for plasma treatment under the atmospheric pressure for treating an article to be treated comprising: providing a solid dielectric on at least one opposing face of a pair of opposing electrodes under a pressure near the atmospheric pressure; introducing a treatment gas between said a pair of opposing electrodes; generating plasma by applying an electric field between said electrodes; and contacting the plasma with the article to be treated, wherein an used gas is exhausted from the vicinity of treatment section where said plasma and said body to be treated are in contact, and said vicinity of treatment section is maintained under a specified gas atmosphere by a gas atmosphere control mechanism.
2. The method for plasma treatment under the atmospheric pressure according to claim 1, wherein said exhaustion of the used gas from the vicinity of treatment section is performed by a gas passage-control mechanism composed of a passage for the plasma gas blown out, a passage to an exhaust gas exit and a sealed space substantially preventing a gas flow to said vicinity of treatment section.
3. The method for plasma treatment under the atmospheric pressure according to claim 1, wherein said exhaustion of the used gas from said vicinity of treatment section is performed by an exhaustion mechanism which exhausts the used gas from the back side of a support for said article to be treated.
4. The method for plasma treatment under the atmospheric pressure according to one of claims 1 to 3, wherein said gas atmosphere control mechanism is a mechanism whereby said vicinity of treatment section, where said plasma and said article to be treated are in contact, is maintained under the specified gas atmosphere by a gas curtain mechanism.
5. The method for plasma treatment under the atmospheric pressure according to one of claims 1 to 4, wherein said vicinity of treatment section, where

- said plasma and said article to be treated are in contact, is maintained under the specified gas atmosphere by providing an exhaust gas exit in the periphery of said vicinity of treatment section where said plasma and said article to be treated are in contact, and also said gas curtain mechanism in the periphery of said vicinity of an exhaust gas exit.
6. The method for plasma treatment under the atmospheric pressure according to claim 1, wherein, in the plasma treatment using a remote source having an extended length of nozzle equipped in crosswise direction of said article to be treated, an exhaust gas exit is provided in crosswise direction of the treatment section where said plasma and said article to be treated are in contact, and a side seal mechanism is provided in the lengthwise direction of said treatment section.
 7. The method for plasma treatment under the atmospheric pressure according to claim 1, wherein said vicinity of treatment section, where said plasma and said article to be treated are in contact, is maintained under the specified gas atmosphere by conducting the treatment in a vessel through which the specified gas flows.
 8. The method for plasma treatment under the atmospheric pressure according to claim 1, wherein at least two chambers composed of chamber 1 enclosing a discharge plasmageneration section and said article to be treated and chamber 2 enclosing said chamber 1 are provided, and those chambers are designed so that a gas flows out from said chamber 1 and the external air flows into said chamber 2 by making the pressure in said chamber 2 lower than the pressure in said chamber 1, and also lower than the external atmospheric pressure.
 9. The method for plasma treatment under the atmospheric pressure according to one of claims 1 to 8, wherein said specified gas atmosphere comprises at least one kind of gas selected from the group consisting of nitrogen, argon, helium, neon, xenon and dry air.
 10. The method for plasma treatment under the atmospheric pressure according to one of claims 1 to 8, wherein said electric field applied between the electrodes is a pulse-like electric field having a pulse rise time and/or a pulse decay time of not longer than 10 μ s and a field strength of 10 to 1,000 kV/cm.
 11. An equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes with a solid dielectric being provided on at least one opposing face thereof; a mechanism for introducing a treatment gas between said a pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a mechanism for contacting the plasma obtained by said electric field with said article to be treated; a mechanism for exhausting an used gas; and a mechanism for maintaining the vicinity of treatment section, where said plasma and said article to be treated are in contact, under the specified gas atmosphere.
 12. The equipment for plasma treatment under the atmospheric pressure according to claim 11, wherein said mechanism for exhausting the used gas from said vicinity of treatment section is a gas passage control mechanism composed of a passage for said plasma gas blown out, a passage to an exhaust gas exit and a sealed space substantially preventing a gas flow to said vicinity of treatment section.
 13. The equipment for plasma treatment under the atmospheric pressure according to claim 11, wherein said mechanism for maintaining said vicinity of treatment section, where said plasma and said article to be treated are in contact, under the specified gas atmosphere is a gas curtain mechanism.
 14. The equipment for plasma treatment under the atmospheric pressure according to one of claims 11 to 13, wherein said vicinity of treatment section, where said plasma and said article to be treated are in contact, is maintained under the specified gas atmosphere, by providing a gas exhausting mechanism in the periphery of said vicinity of treatment section, where said plasma and said article to be treated are in contact, and said gas curtain mechanism in the periphery of the gas exhausting mechanism.
 15. The equipment for plasma treatment under the atmospheric pressure according to claim 11, wherein said vicinity of treatment section, where said plasma and said article to be treated are in contact, is maintained under the specified gas atmosphere by conducting the treatment in a vessel through which the specified gas flows.
 16. The equipment for plasma treatment under the atmospheric pressure according to claim 11, wherein at least two chambers composed of chamber 1 enclosing a discharge plasma generation section and said article to be treated and chamber 2 enclosing said chamber 1 are provided, and those chambers are designed so that a gas flows out from said chamber 1 and the external air flows into said chamber 2 by making the pressure in said chamber 2 lower than the pressure in said chamber 1, and also lower than the external atmospheric pressure.

Amended claims under Art. 19.1 PCT

1. Please replace paragraphs from page 3, line 19 to page 8, line 16 with the following paragraphs.

The first aspect of the present invention provides a method for plasma treatment under the atmospheric pressure for treating an article to be treated comprising: providing a pair of opposing electrodes; introducing a treatment gas between said pair of electrodes under a pressure near the atmospheric pressure; generating plasma by applying an electric field between said electrodes; and contacting said plasma from a gas blow opening with an article to be treated, while a used gas is exhausted from an exhaust gas passage provided in a vicinity of said gas blow opening, wherein the plasma treatment is conducted under conditions wherein a conductance of a leak gas passage is smaller than a conductance of said exhaust gas passage in order to seal a treatment space, said leak gas passage being formed between said gas blow opening and article.

The second aspect of the present invention provides a method for plasma treatment under the atmospheric pressure using a remote source for treating an article to be treated comprising: providing a pair of opposing electrodes; introducing a treatment gas between said pair of electrodes under a pressure near the atmospheric pressure; generating plasma by applying an electric field between said electrodes; and contacting said plasma from a gas blow opening of an extended length with an article to be treated in a plasma treatment section, wherein the plasma treatment is conducted under conditions wherein the position of each of said remote source and article relative to the other is variable and the leak of a gas to the outside of said plasma treatment section and inflow of a gas from the outside of said plasma treatment section, each might occur through each side of said gas blow opening, said side being perpendicular to the lengthwise direction of gas blow opening.

The third aspect of the present invention provides a method for plasma treatment under the atmospheric pressure for treating an article to be treated comprising: providing a pair of opposing electrodes; introducing a treatment gas between said pair of electrodes under a pressure near the atmospheric pressure; generating plasma by applying an electric field between said electrodes; and contacting said plasma from a gas blow opening with an article to be treated, wherein at least two chambers composed of chamber 1 enclosing a discharge plasma generation section and said article to be treated and chamber 2 enclosing said chamber 1 are provided, and said two chambers are designed so that a gas flows out from said chamber 1 and the external air flows into said chamber 2 by

making the pressure in said chamber 2 lower than each of the pressure in said chamber 1 and the external pressure, while introducing said treatment gas into said chamber 1.

The forth aspect of the present invention provides the method for plasma treatment under the atmospheric pressure according to one of the first to third aspects above, wherein said electric field applied between the electrodes is a pulse-like electric field having a pulse rise time and/or a pulse decay time of not longer than 10 μ s, a field strength of 10 to 1,000 kV/cm and a frequency of not less than 0.5 kHz.

The fifth aspect of the present invention provides an equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes; a mechanism for introducing a treatment gas between said pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a gas blow opening from which the plasma obtained by said electric field blows out to an article to be treated; and a mechanism for exhausting an used gas from a exhaust gas passage, which is arranged so that a conductance of a leak gas passage is smaller than a conductance of said exhaust gas passage in order to seal a treatment space, said leak gas passage being formed between said gas blow opening and article.

The sixth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to the sixth aspect above, wherein said gas blow opening is provided in a nozzle member having first baffle and said exhaust gas passage, so that a space in said gas blow opening is smaller than a discharge space formed between said opposing electrodes, and wherein second baffle is provided in an inlet of said exhaust gas passage, so that the pressure of plasma blows out from said nozzle member is lower than the pressure in said leak gas passage.

The seventh aspect of the present invention provides an equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes; a mechanism for introducing a treatment gas between said pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a gas blow opening of an extended length from which the plasma obtained by said electric field blows out to an article to be treated; a mechanism for exhausting an used gas; and a labyrinth seal, wherein the position of each of a remote source and a support for an article to be treated relative to the other is variable, said remote source having said gas blow opening and electrodes, and wherein an upper member of said labyrinth seal is provided in each side of said remote source, said side being perpendicular to the lengthwise direction of said remote source and a lower

member of said labyrinth seal is provided on a support.

The eighth aspect of the present invention provides an equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes; a mechanism for introducing a treatment gas between said pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a gas blow opening from which the plasma obtained by said electric field blows out to an article to be treated; and a mechanism for exhausting an used gas from an exhaust gas passage, wherein at least two chambers composed of chamber 1 enclosing a discharge plasma generation section and said article to be treated and chamber 2 enclosing said chamber 1 are provided, and those chambers are designed so that a gas flows out from said chamber 1 and the external air flows into said chamber 2 by making the pressure in said chamber 2 lower than each of the pressure in said chamber 1 and the external pressure, while introducing said treatment gas into said chamber 1.

The ninth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to the eighth aspect above, wherein each of said chambers 1 and 2 has an opening for carrying in/out the article to be treated.

The tenth aspect of the present invention provides the equipment for plasma treatment under the atmospheric pressure according to one of the fifth to ninth aspects above, wherein said electric field applied between the electrodes is a pulse-like electric field having a pulse rise time and/or a pulse decay time of not longer than 10 μ s, a field strength of 10 to 1,000 kV/cm and a frequency of not less than 0.5 kHz.

treating an article to be treated comprising: providing a pair of opposing electrodes; introducing a treatment gas between said pair of electrodes under a pressure near the atmospheric pressure; generating plasma by applying an electric field between said electrodes; and contacting said plasma from a gas blow opening with an article to be treated, while a used gas is exhausted from an exhaust gas passage provided in a vicinity of said gas blow opening, wherein the plasma treatment is conducted under conditions wherein a conductance of a leak gas passage is smaller than a conductance of said exhaust gas passage in order to seal a treatment space, said leak gas passage being formed between said gas blow opening and article.

2. A method for plasma treatment under the atmospheric pressure using a remote source for treating an article to be treated comprising: providing a pair of opposing electrodes; introducing a treatment gas between said pair of electrodes under a pressure

near the atmospheric pressure; generating plasma by applying an electric field between said electrodes; and contacting said plasma from a gas blow opening of an extended length with an article to be treated in a plasma treatment section, wherein the plasma treatment is conducted under conditions wherein the position of each of said remote source and article relative to the other is variable and the leak of a gas to the outside of said plasma treatment section and inflow of a gas from the outside of said plasma treatment section, each might occur through each side of said gas blow opening, said side being perpendicular to the lengthwise direction of gas blow opening.

3. A method for plasma treatment under the atmospheric pressure for treating an article to be treated comprising: providing a pair of opposing electrodes; introducing a treatment gas between said pair of electrodes under a pressure near the atmospheric pressure; generating plasma by applying an electric field between said electrodes; and contacting said plasma from a gas blow opening with an article to be treated, wherein at least two chambers composed of chamber 1 enclosing a discharge plasma generation section and said article to be treated and chamber 2 enclosing said chamber 1 are provided, and said two chambers are designed so that a gas flows out from said chamber 1 and the external air flows into said chamber 2 by making the pressure in said chamber 2 lower than each of the pressure in said chamber 1 and the external pressure, while introducing said treatment gas into said chamber 1.

4. The method for plasma treatment under the atmospheric pressure according to one of claims 1 to 3, wherein said electric field applied between the electrodes is a pulse-like electric field having a pulse rise time and/or a pulse decay time of not longer than 10 μ s, a field strength of 10 to 1,000 kV/cm and a frequency of not less than 0.5 kHz.

5. An equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes; a mechanism for introducing a treatment gas between said pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a gas blow opening from which the plasma obtained by said electric field blows out to an article to be treated; and a mechanism for exhausting an used gas from an exhaust gas passage, which is arranged so that a conductance of a leak gas passage is smaller than a conductance of said exhaust gas passage in order to seal a treatment space, said leak gas passage being formed between said gas blow opening and article.

6. The equipment for plasma treatment under the

atmospheric pressure according to claim 5, wherein said gas blow opening is provided in a nozzle member having first baffle and said exhaust gas passage, so that a space in said gas blow opening is smaller than a discharge space formed between said opposing electrodes, and wherein second baffle is provided in an inlet of said exhaust gas passage, so that the pressure of plasma blows out from said nozzle member is lower than the pressure in said leak gas passage.

7. An equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes; a mechanism for introducing a treatment gas between said pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a gas blow opening of an extended length from which the plasma obtained by said electric field blows out to an article to be treated; a mechanism for exhausting an used gas; and a labyrinth seal, wherein the position of each of a remote source and a support for an article to be treated relative to the other is variable, said remote source having said gas blow opening and electrodes, and wherein an upper member of said labyrinth seal is provided in each side of said remote source, said side being perpendicular to the lengthwise direction of said remote source and a lower member of said labyrinth seal is provided on a support.

8. An equipment for plasma treatment under the atmospheric pressure comprising: a pair of opposing electrodes; a mechanism for introducing a treatment gas between said pair of opposing electrodes; a mechanism for applying an electric field between said electrodes; a gas blow opening from which the plasma obtained by said electric field blows out to an article to be treated; and a mechanism for exhausting an used gas from a exhaust gas passage, wherein at least two chambers composed of chamber 1 enclosing said plasma opposing electrodes and said article and chamber 2 enclosing said chamber 1 are provided, and said two chambers are designed so that a gas flows out from said chamber 1 and the external air flows into said chamber 2 by making the pressure in said chamber 2 lower than each of the pressure in said chamber 1 and the external pressure, while introducing said treatment gas into said chamber 1.

9. The equipment for plasma treatment under the atmospheric pressure according to claim 8, wherein each of said chambers 1 and 2 has an opening for carrying in/out the article to be treated.

10. The equipment for plasma treatment under the atmospheric pressure according to one of claims 5 to 9, wherein said electric field applied between the

electrodes is a pulse-like electric field having a pulse rise time and/or a pulse decay time of not longer than 10 μ s, a field strength of 10 to 1,000 kV/cm and a frequency of not less than 0.5 kHz.

Figure 1

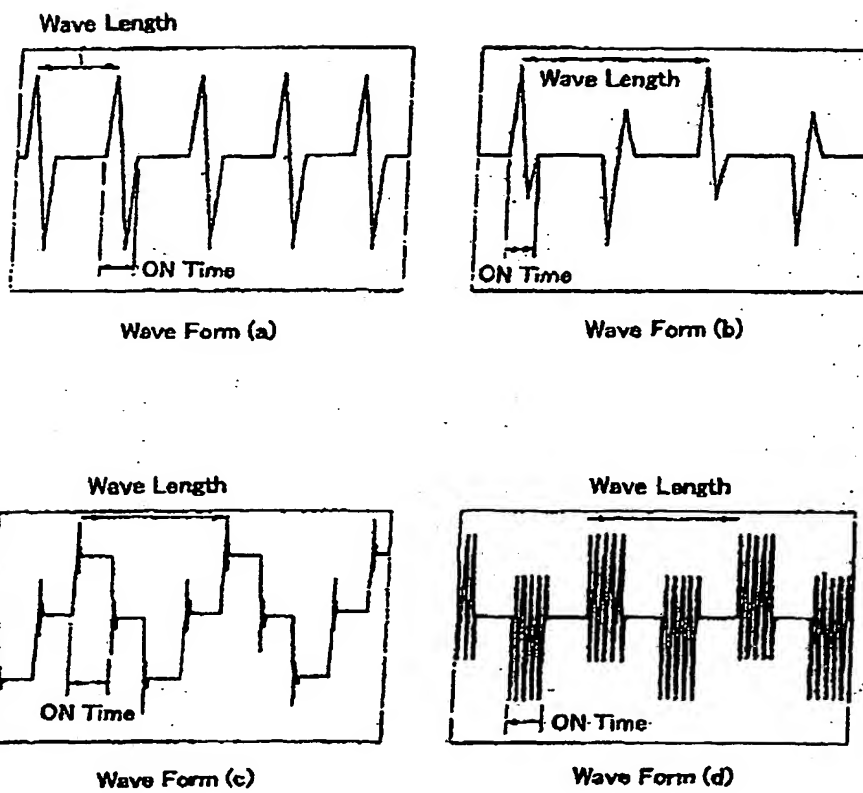


Figure 2

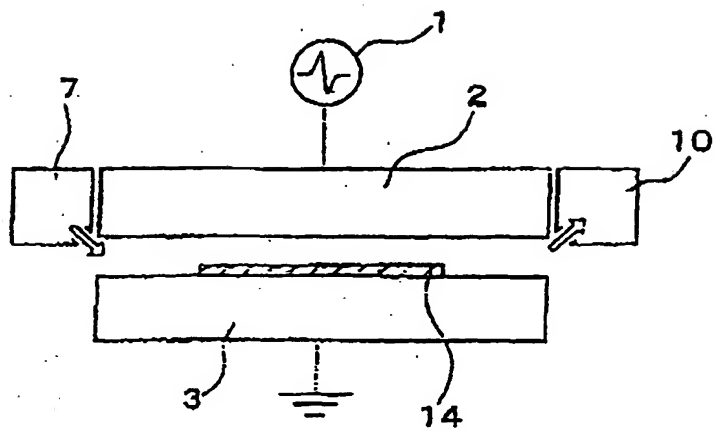


Figure 3

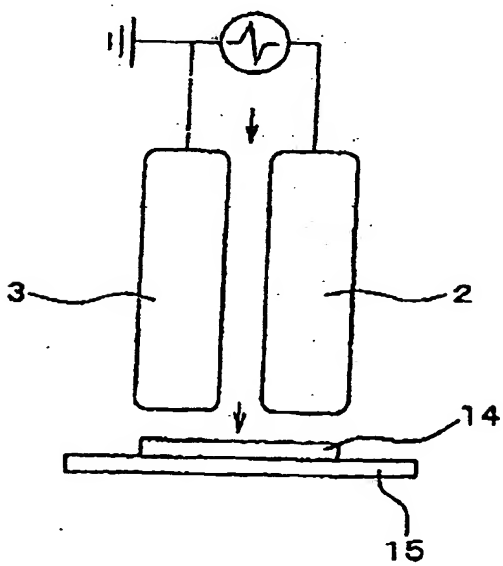


Figure 4



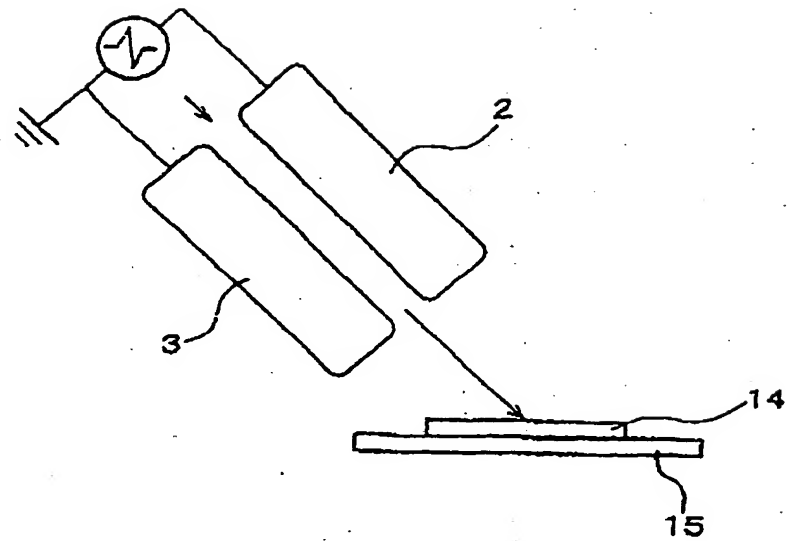



Figure 5

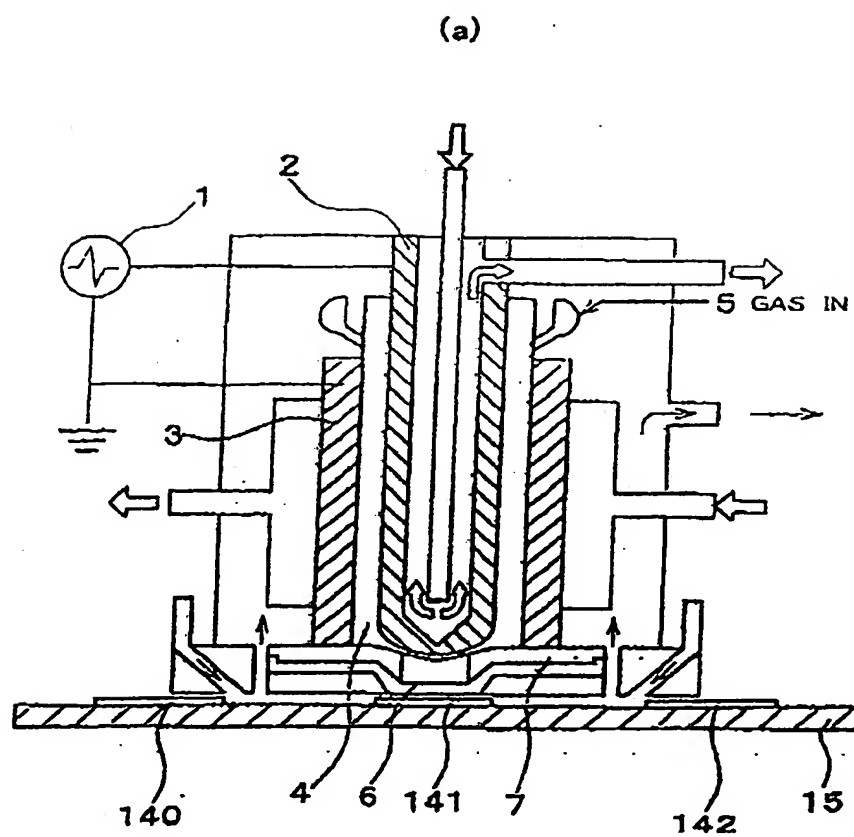

(b)

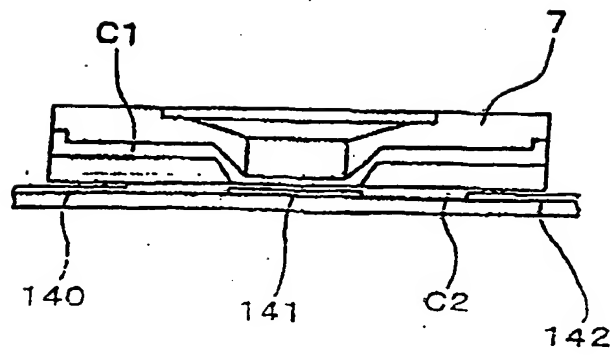

(c)

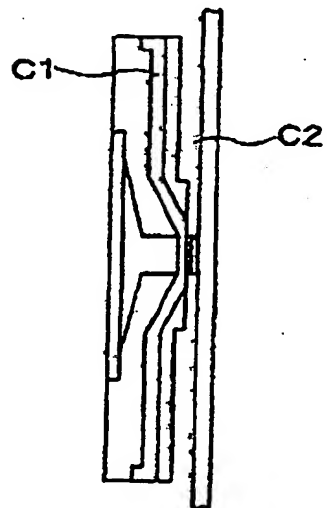

(d)



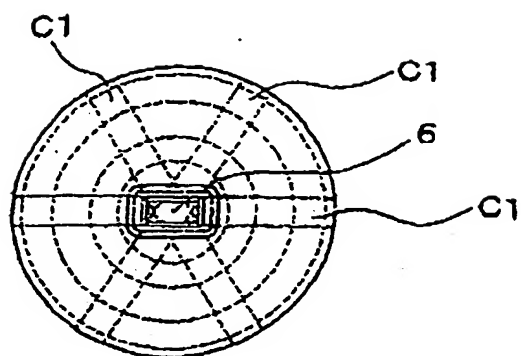


Figure 6

(a)

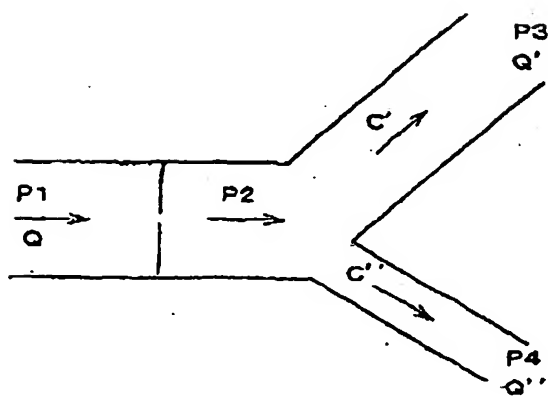

(b)

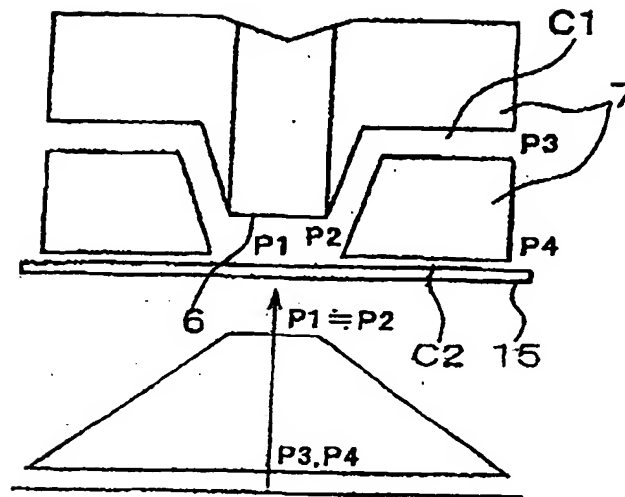

(c)

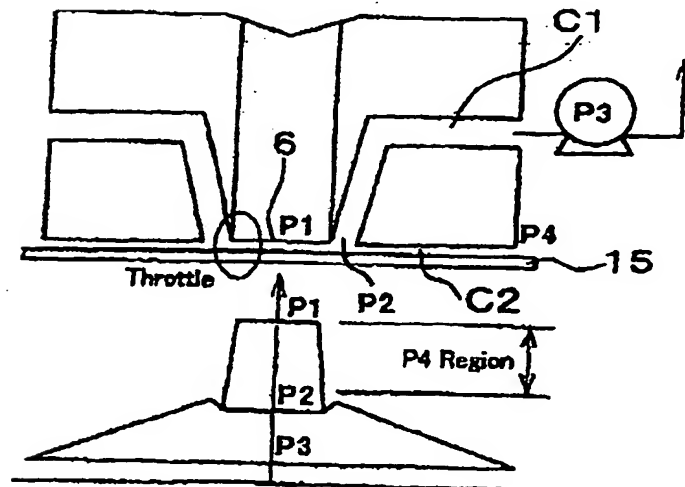


Figure 7

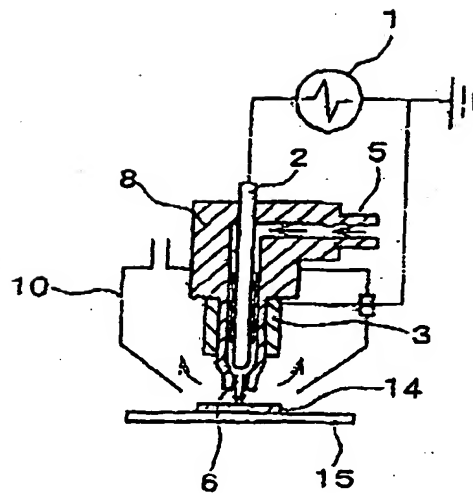
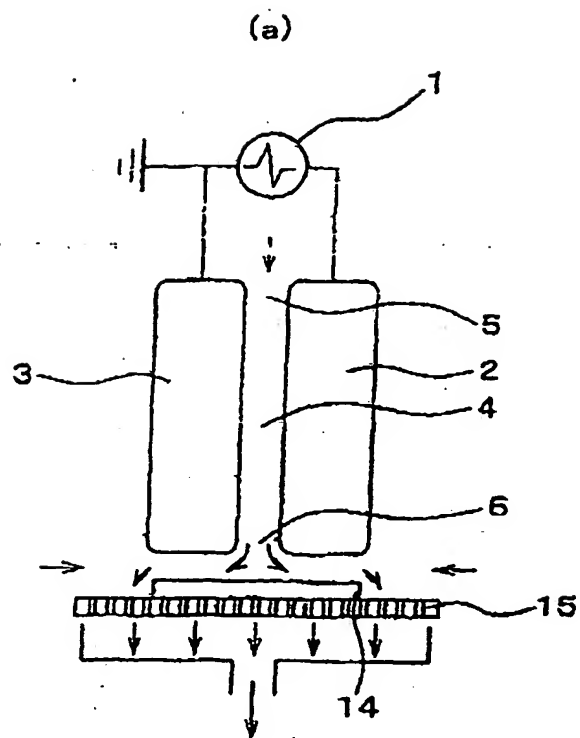


Figure 8



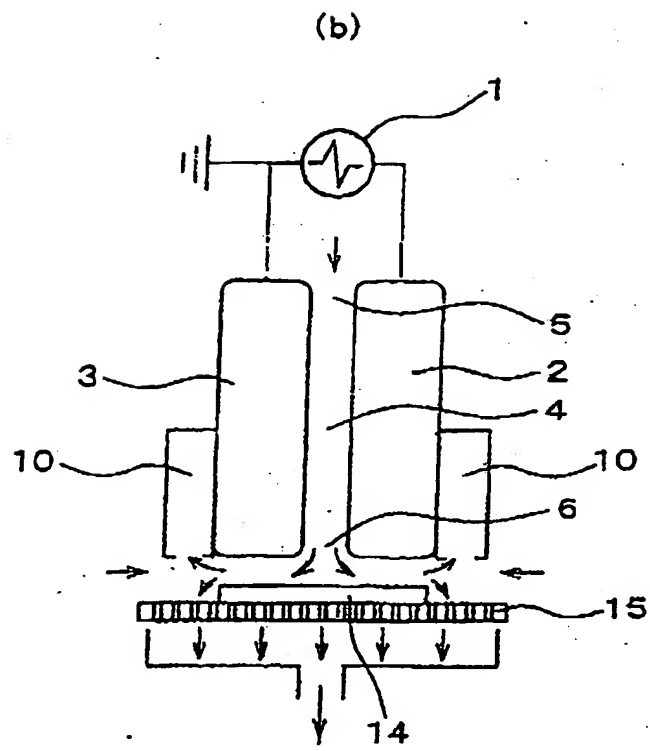
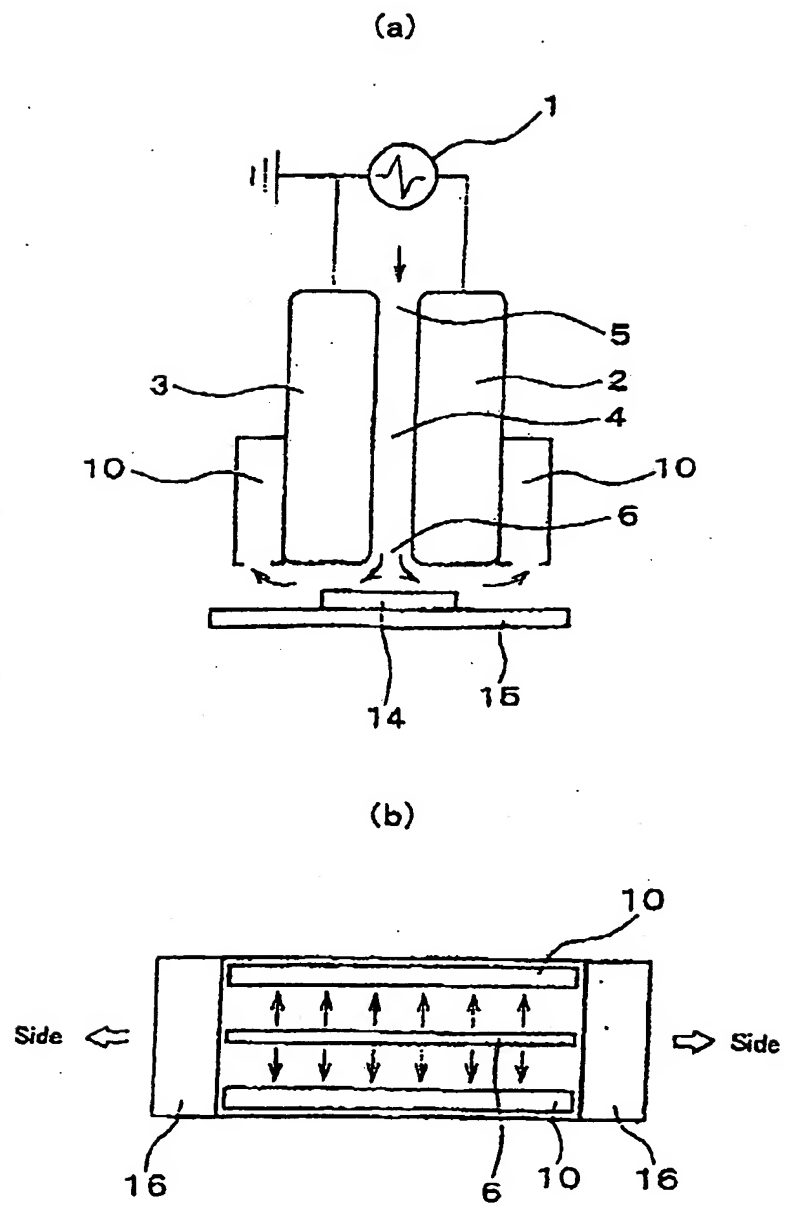


Figure 9



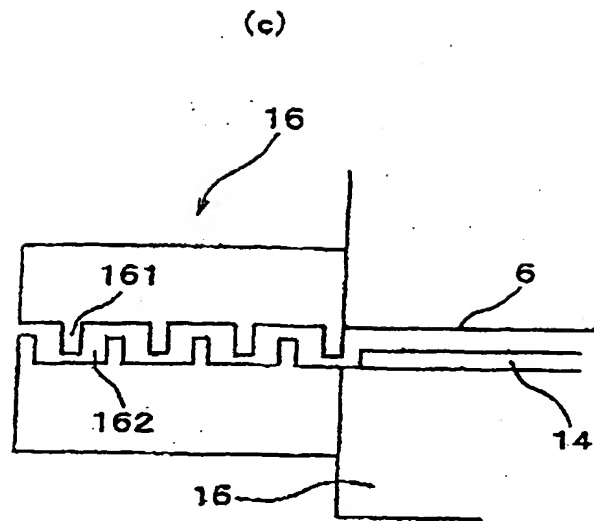


Figure 10

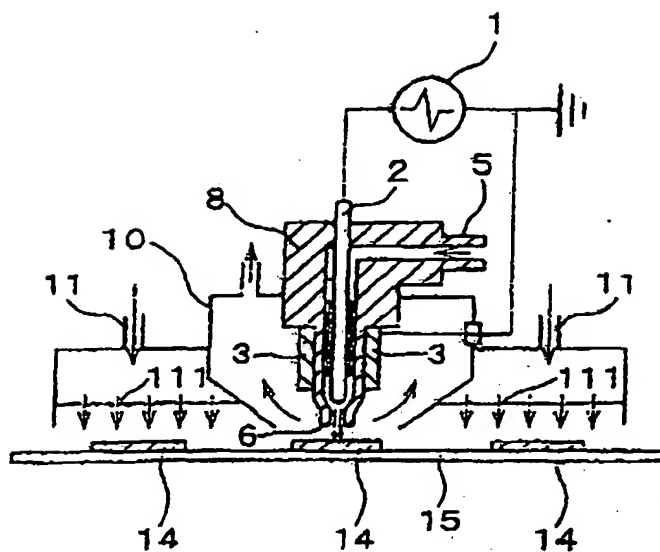


Figure 11

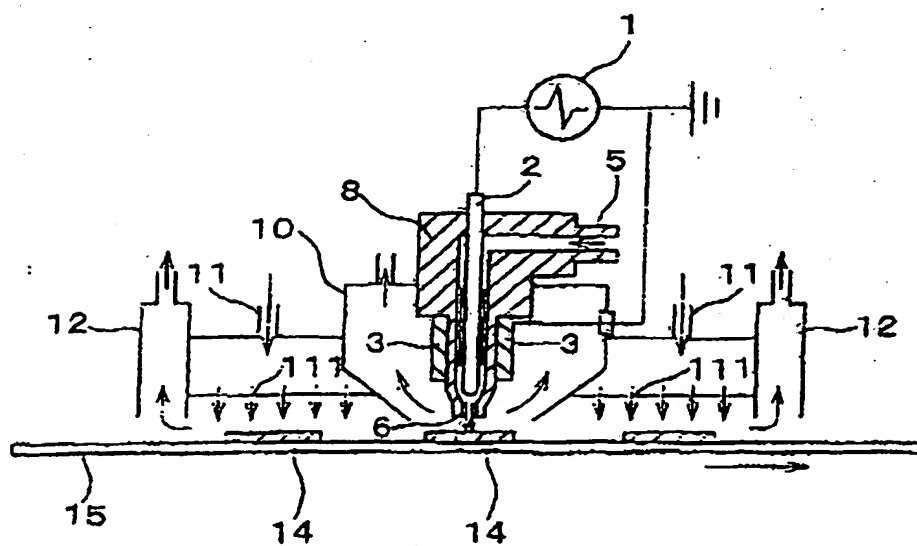


Figure 12

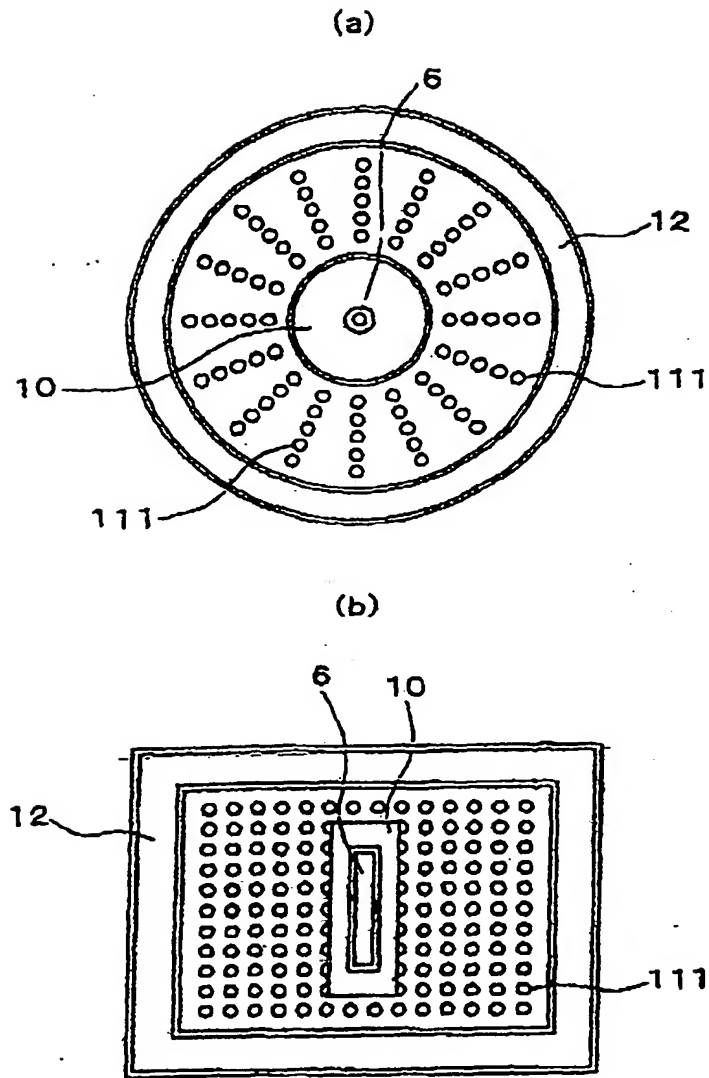


Figure 13

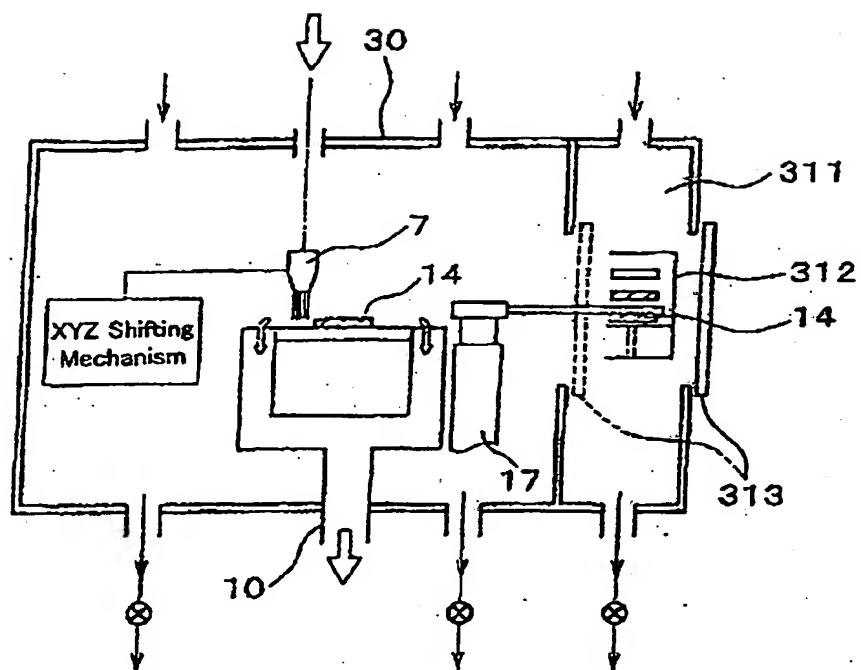


Figure 14

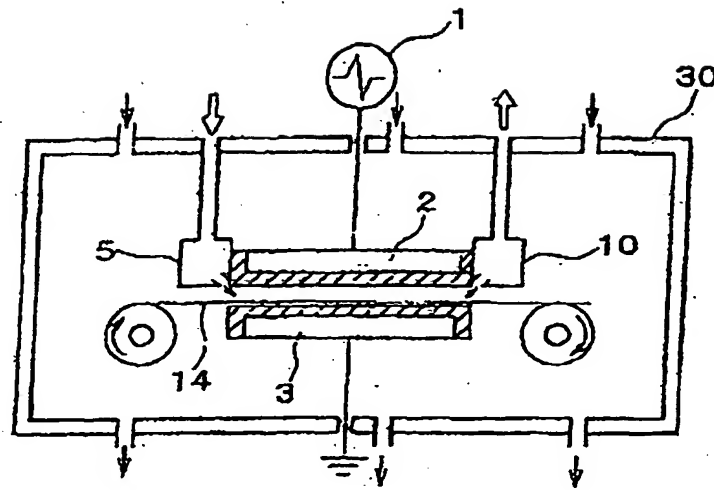


Figure 15


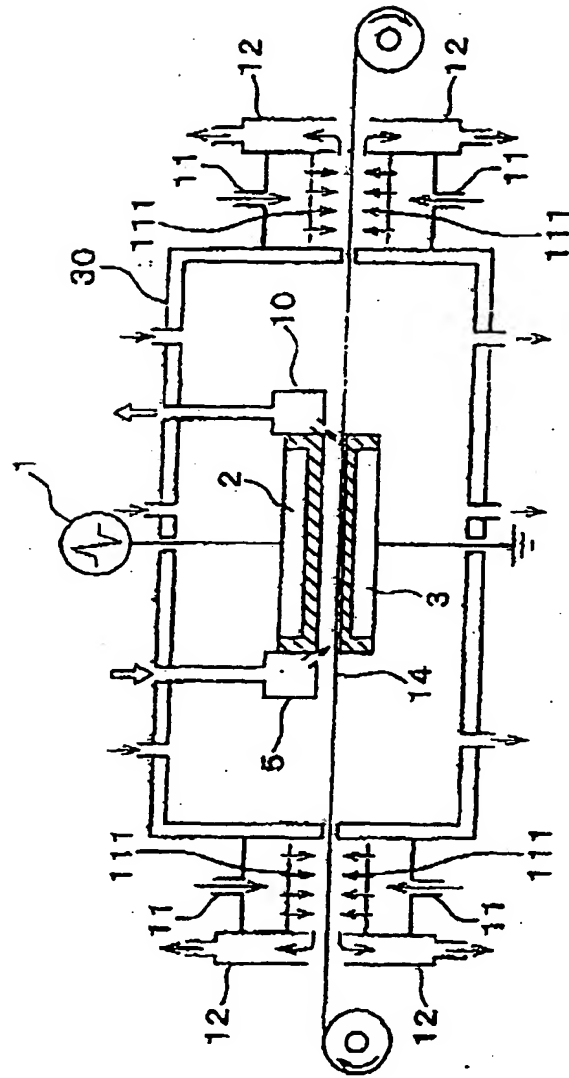


Figure 16

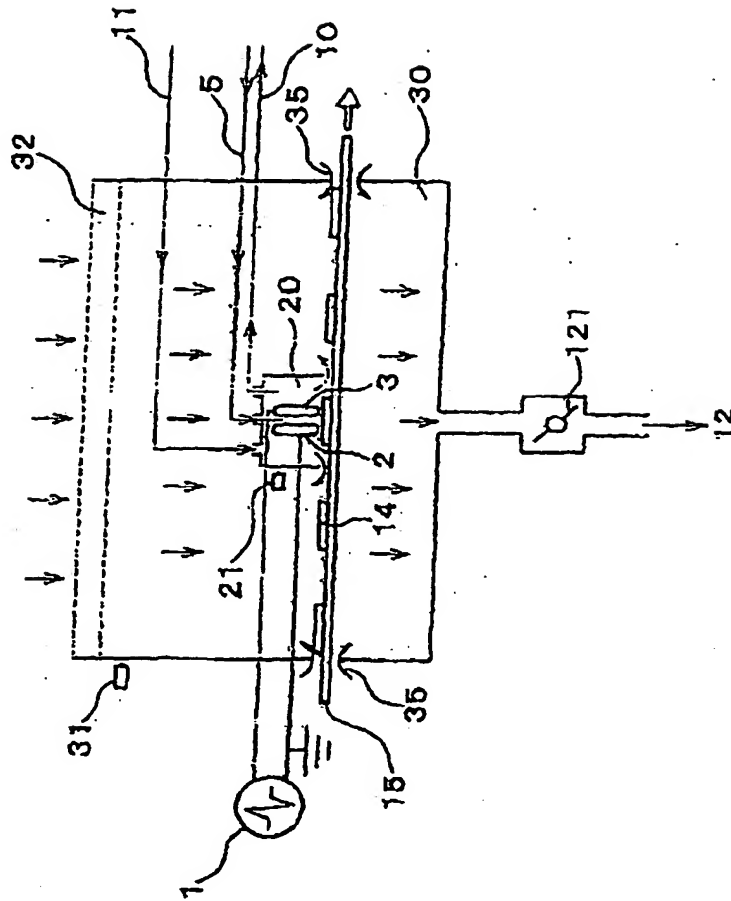

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/09941

A. CLASSIFICATION OF SUBJECT MATTER		
Int. Cl. ⁷ C23C16/54, H01L21/205, H01L21/31, H01L21/302		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Int. Cl. ⁷ C23C16/00-56, H01L21/205, H01L21/31, H01L21/302, H05H1/46		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Jitsuyo Shinan Koho 1926-1996 Jitsuyo Shinan Toroku Koho 1996-2002 Kokai Jitsuyo Shinan Koho 1971-2002 Toroku Jitsuyo Shinan Koho 1994-2002		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 9-92493 A (Seiko Epson Corporation), 04 April, 1997 (04.04.1997), Par. Nos. [0015] to [0024]; Fig. 2 (Family: none)	1, 2, 4-7, 9, 11-15
Y		10
X	JP 7-62546 A (Shinnko Electric Co., Ltd.), 07 March, 1995 (07.03.1995), Par. Nos. [0006] to [0009]; Figs. 3, 4 (Family: none)	1-5, 7, 9, 11-15
Y		10
X	JP 7-166356 A (Sekisui Chemical Co., Ltd.), 27 June, 1995 (27.06.1995), Par. Nos. [0015] to [0036]; Fig. 1 (Family: none)	1, 8, 11, 16
Y		10
Y	JP 11-241165 A (Sekisui Chemical Co., Ltd.), 07 September, 1999 (07.09.1999), Par. Nos. [0024] to [0027] (Family: none)	10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "Z" document member of the same patent family		
Date of the actual completion of the international search 12 February, 2002 (12.02.02)		Date of mailing of the international search report 26 February, 2002 (26.02.02)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)